

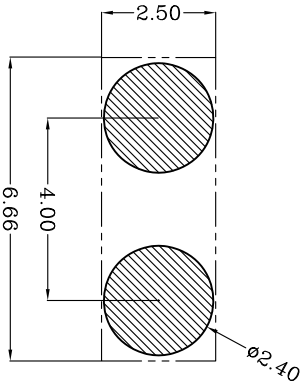
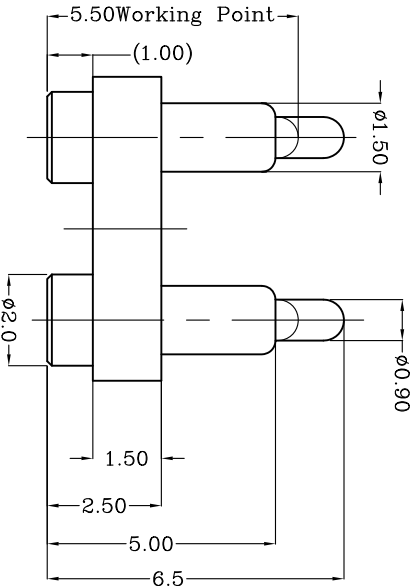


DWG NO.
C-100050

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

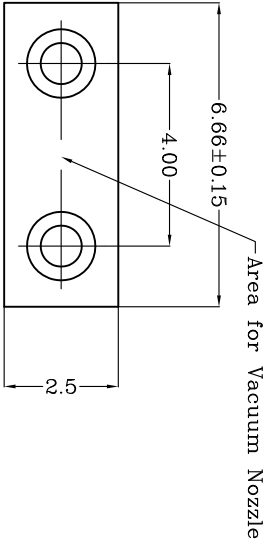

Recommended PCB Layout

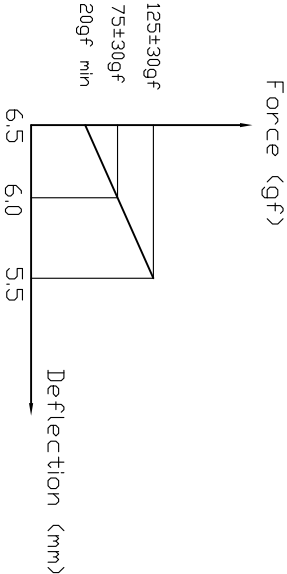

TOP-LINK

Notes:

- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
- 2 Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um Ni.
- 3 Packing: Reel Tape

Contact: Brass

LDC
DIST
-

update remark	2007/12/03
REVISION	
RECORD	
APVD	
DATE	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	—	FIN	—	✓
DWN		APVD				
CHK		REL				
NAME	BATTERY POGO CONNECTOR 2 POSITIONS					
SCALE	1:1	A4	DWG NO.	C-100050	SHEET 1 OF 1	REV B

Top-Link
Electronics Ltd.

USED ON

-

100050-2

PART NUMBER

A

B

C

D

4

3

2

1