
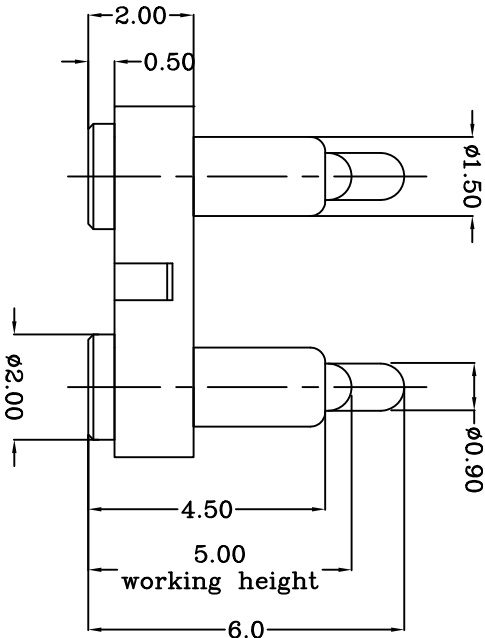



DWG NO.
C-100575

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

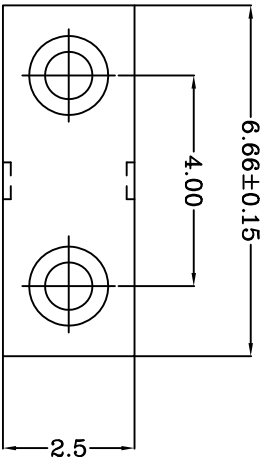

TOP-LINK

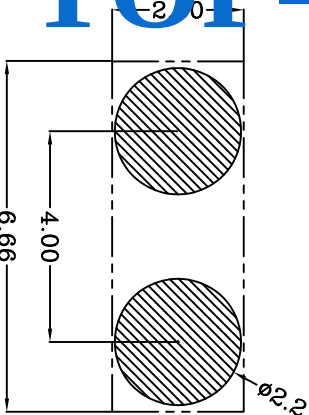

Recommended PCB Layout

Notes:
△ Material(材质):

- 1) Body : Brass
- 2) Plunge : Stainless steel wire
- 3) Spring : Stainless steel wire
- 4) Plating(电镀):

- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3) Mechanical(机械性能):
 - 1) Force: 90gf Min per pin at 1.0mm stroke (力: 下压1.0mm的力: 90gf Min)
 - 2) Total stroke(总行程) : 1.50mm
 - 3) Durability(寿命): 10,000 cycle min.
- 4) Electrical(电性能)
 - 1) Contact resistance(接触抵抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±	0.0	= ±0.15	0.00	= ±0.10	0.000	= ±
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
NAME		PGGD CONNECTOR 2 POSITIONS		SCALE		1:1	
CHK		REL		A4		ND	
DWN		APVD		A4		ND	
MATERIAL		HT TR		A4		ND	
FIN		—		A4		ND	
PART NUMBER		100575-2		A4		ND	
SHEET		1 OF 1		A4		ND	
REV		1		A4		ND	

USED ON

—