

DWG NO. C-110462


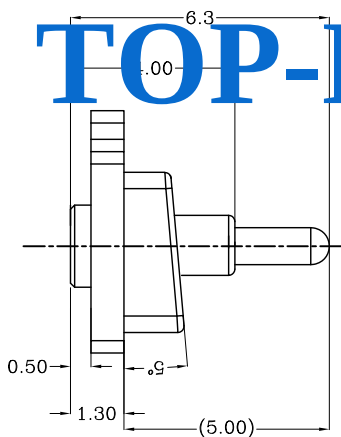


Diagram A-A shows a cross-section of the shaft and housing assembly. The shaft has a central hole with a diameter of 0.35. The housing has a bore with a diameter of 0.35. The shaft is inserted into the housing, and the cross-section shows the internal threads of the housing and the shaft.

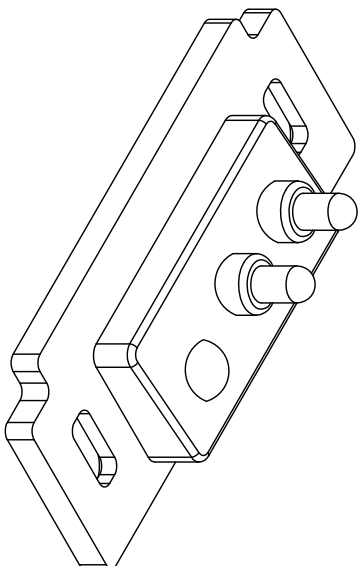

USED ON

110462-3

PART NUMBER

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)

Contact: Brass

2 Mechanical demands:
Plating Plunger: Min 0.4µm Au over 1.4µm Ni
Plating Body: Min 0.1µm Au over 1.4µm Ni.

LDC			HANDLE:	21	NAME	BATTERY POGD CONNECTOR 2 POSITIONS
-		NEW	SURF TEXTURE:	32/ V	DWG NO.	PGC-1.5-6.3-1R-2P-2.SPH
DIST		REVISION RECORD	APVD	DATE	SCALE	SHEET
-				2009/01/15	1:1	1 OF 1
						REV A

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = $\pm$ -		DWN		APVD		— ✓	
0.0 = $\pm$ 0.15		qin		Lansing		Top-Link Electronics Ltd	
0.00 = $\pm$ 0.10		CHK		REL			
0.000 = $\pm$		Jim					
ANGLE: $\pm$ 1°							
SURF TEXTURE: 32/		NAME BATTERY POGO CONNECTOR 2 POSITIONS					
REMOVED BURS, BREAK SHARP EDGES R0.05 MAX		SCALE		DWG NO.		SHEET	
DD NOT SCALE PRINT		1:1		A4		1 OF 1	
				C-110462		REV A	