
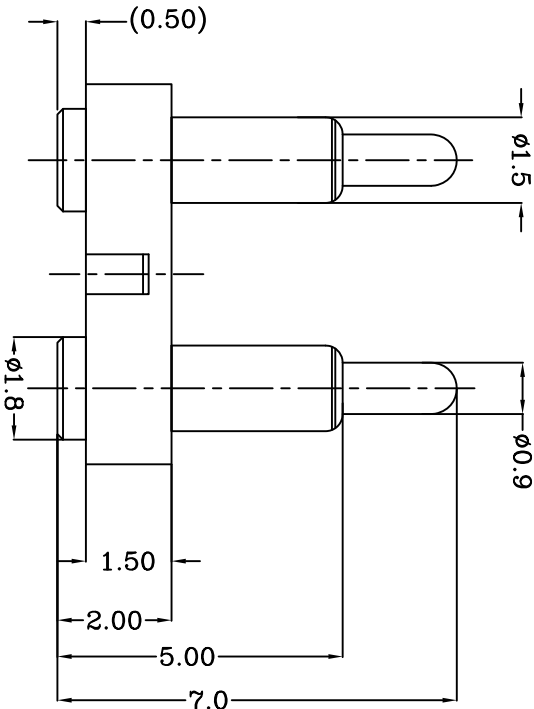
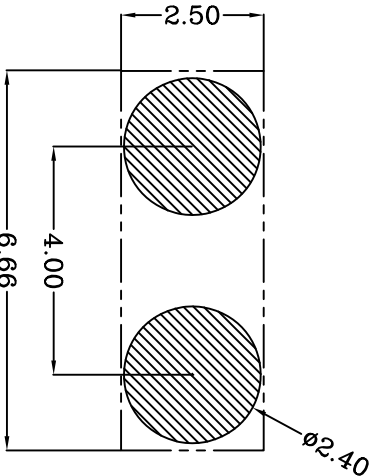
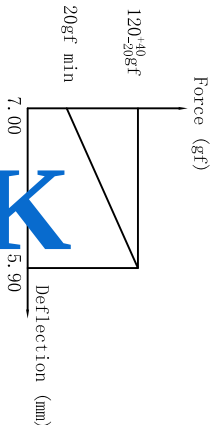


DWG NO.
C-100052

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LOC	-
DIST	-

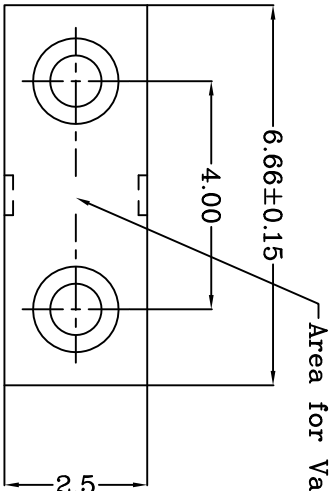

TOP-LINK

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
 - 2 Mechanical demands:
Plating Plunger: Au plating over Ni plating
Plating Body: Au plating over Ni plating
 - 3 Mechanical
1) Total stroke : 2.0mm
2) Durability: 10,000 cycle min.
 - 4 Electrical
1) Contact resistance: 30mOhm Max.
2) Operating voltage: 36VDC MAX.
 - 5 Packing: Reel Tape

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	=	±	-
0.0	=	±	0.15
0.00	=	±	0.10
0.000	=	±	
ANGLE:			± 1°
SURF TEXTURE:			3.2/
REMOVE BURRS			BREAK
SHARP EDGES NO.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWG	Qin	AWD	Top-Link Electronics Ltd.
CHK	Jin	REL	
NAME	BATTERY POGO CONNECTOR 2 POSITIONS		
SCALE	1:1	A4	NO.
PGC-1.5-7.0-R-2P-4.0PH			
C-100052			
SHEET	1	OF	1
REV			2

4

3

2

1

USED ON

-