



LDC	-
DIST	-

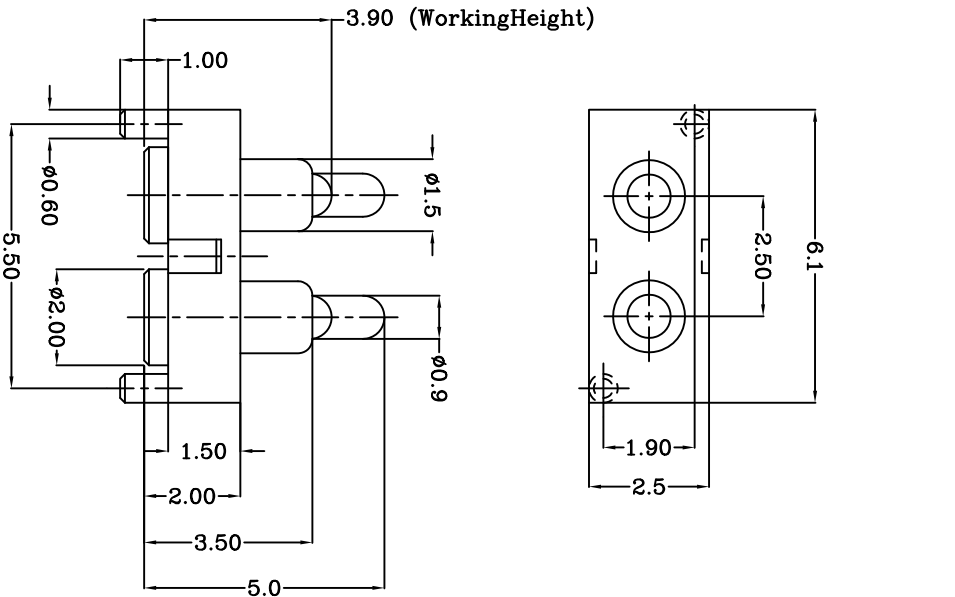

Recommended PCB Layout

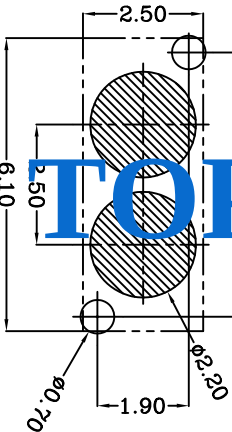

- Notes:
- 1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black.
 - 2 Mechanical demands:
Spring force: 0.50±0.20N with 1.1mm stroke.
Full stroke: 1.4mm
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

New		2008/08/29
REVISION	APVD	DATE
RECORD		
LTR		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	PART NUMBER
DWN	APVD	Lansing	100390-2
CHK	REL	Top-Link Electronics Ltd.	
Andy			
NAME	BATTERY	POGO CONNECTOR 2 POSITIONS	
SCALE	1:1	A4	DWG NO. C-100390
			SHEET 1 OF 1
			REV A

USED ON

-