

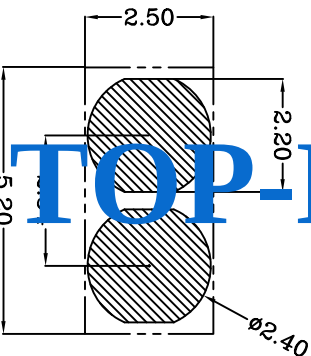
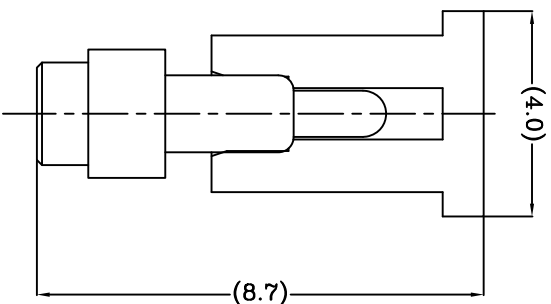
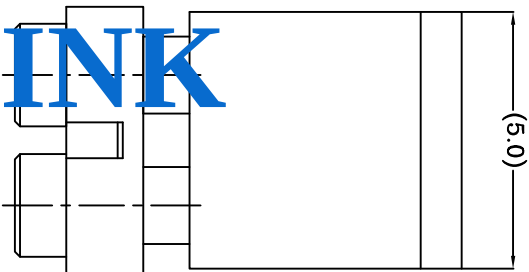
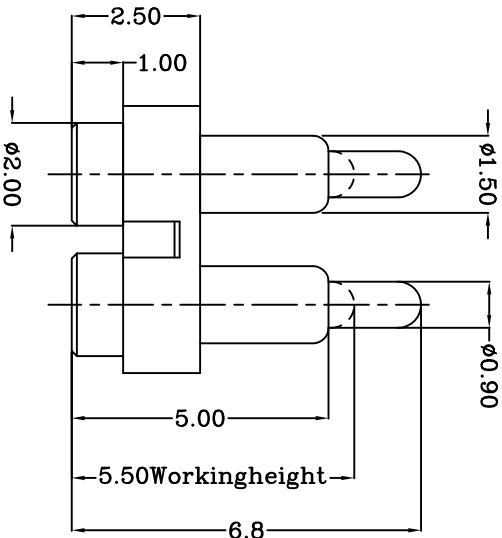





Recommended PCB Layout

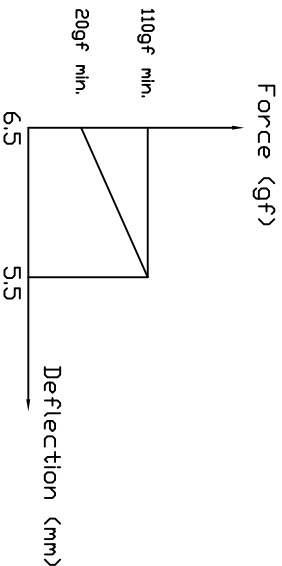

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.
 - 2 Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um .
contact resistance: 30mOhm max.
durability : 10000cycles min.

Contact: Brass

LDC

DIST

-

LTR	REVISION	APVD	DATE
	NEW		0000/12/06
	RECORD		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	PART NUMBER
DWN	APVD	LANISING	100457-2
CHK	REL		
ANDY			
NAME	BATTERY	PGGD	CONNECTOR 2 POSITIONS
SCALE	1:1	A4	DWG NO. C-100457
			PGC-1.5-6.8-R-2P-2.54PH
			Top-Link Electronics L td.
			Top-Link Electronics L td.
			1 OF 1
			REV A

USED ON

-