


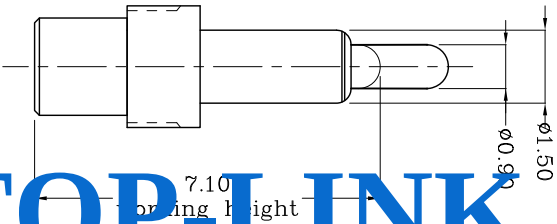



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

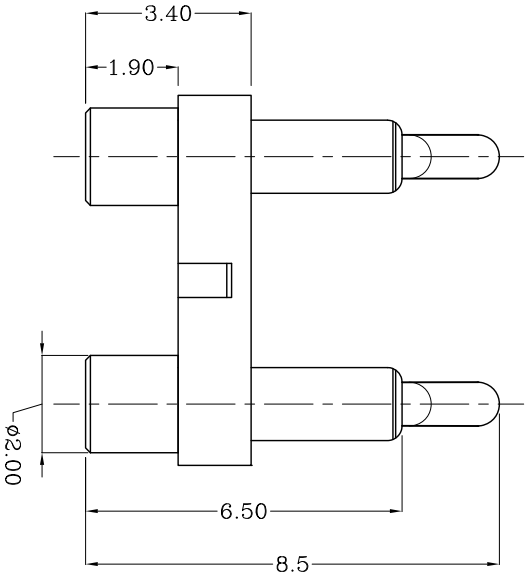

DWG NO.
C-100177

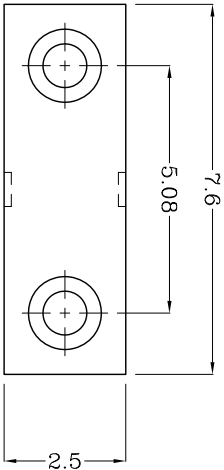

TOP-LINK

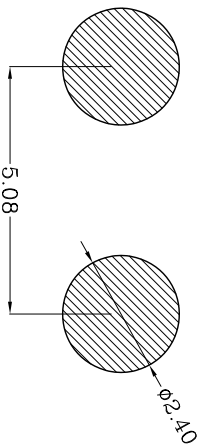

Recommended PCB Layout
Recommended solder paste thickness is 0.10 mm

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black. (UL94V-0)
 - 2 Mechanical demands:
Plating plunger: 0.40um Au over 1.4um Ni
Plating body: 0.10um Au over 1.4um Ni
Force is 115±35 gf at least at working height.

Contact: Brass

LDC	-
DIST	-

ADD	WH			6009/09/09
REVISION	RECORD	APVD	DATE	
LTR				

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FTN
DWN	APVD	
CHK	REL	
Jim		
NAME	BATTERY CONNECTOR 2 PDS.	
SCALE	1:1	
A4	DWG NO.	C-100177
PGC-15-8.5-R-2P-508PH		
100177-2		
PART NUMBER		
1 OF 1		
REV B		