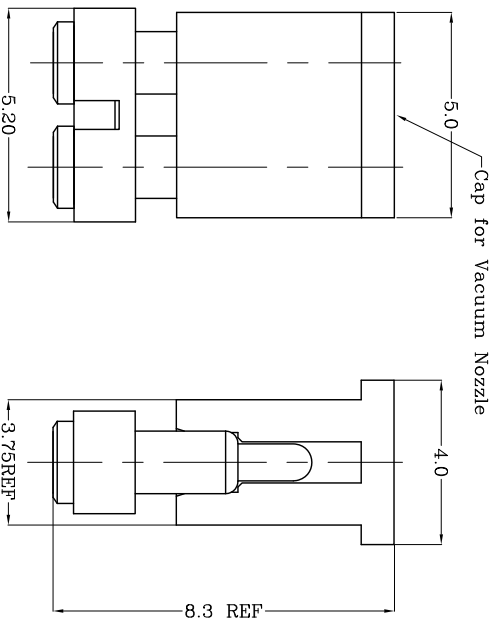
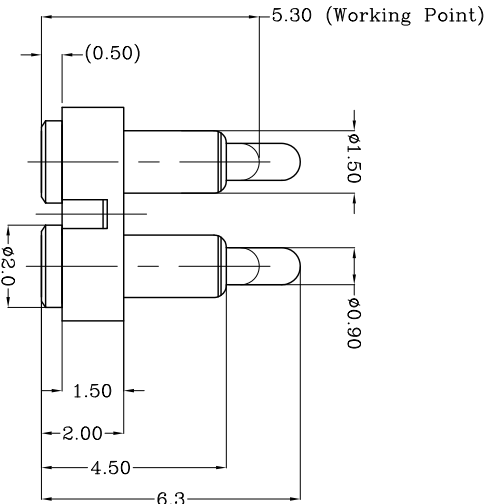




Recommended solder paste thickness is 0.10 mm
Recommended PCB Layout

TOP-LINK

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black.
Contact: Brass
 - 2 Mechanical demands:
Spring force: 105±25g with 1.0mm stroke.
Full stroke: 1.5mm
Plating Plunger: Min. 0.4um Au over 1.4um Ni
Plating Body: Min. 0.1um Au over 1.4um Ni

LDC
-
DIST
-

变更CAP		2010/06/08
NEW		2009/09/08
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△	HT TR	—
DWN	Qin	APVD	
CHK	REL		
NAME PGGD CONNECTOR 2 POSITIONS			
PGC-1.5-6.3-R-2P-2.54PH			
SCALE	1:1	A4	
DWG	ND	C-100244	
SHEET			REV
1 OF 2			B

100244-2
PART NUMBER

USED ON

-