
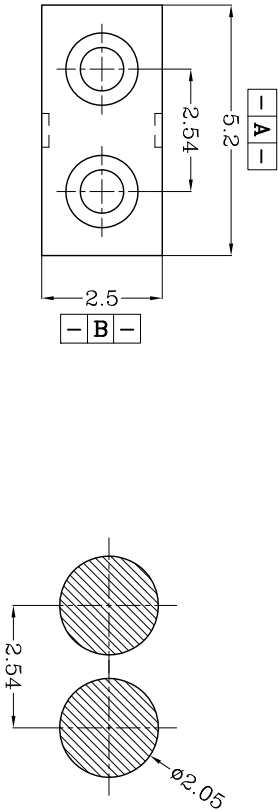
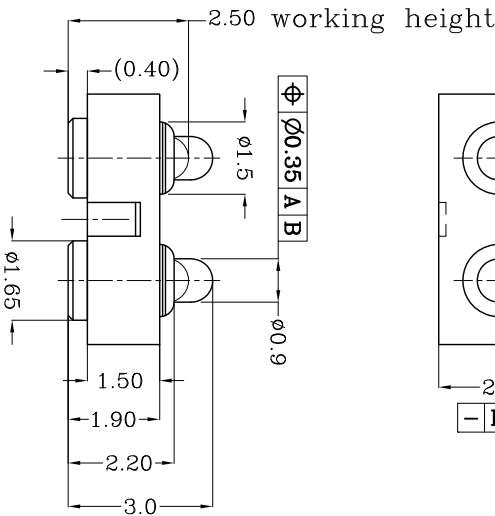


DIST

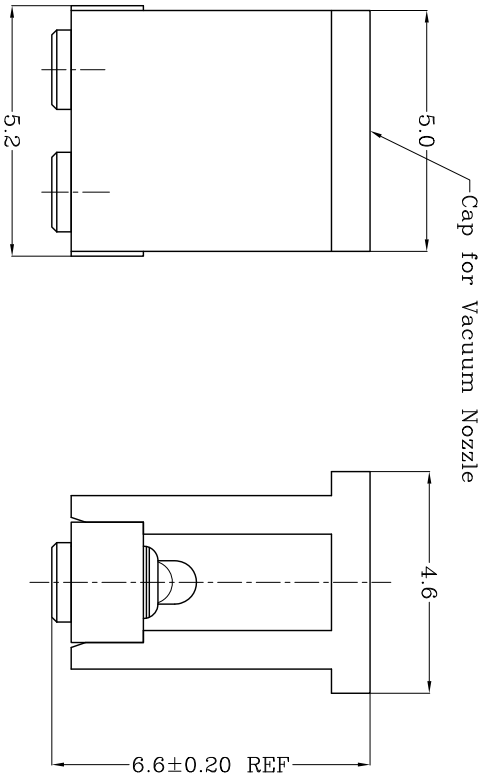

Recommended PCB Layout

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
Resistance:30mOhm Max.
Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance		
working height	2.50mm	90 min<2.1>
Durability	10000cycle	

Item	Part name	Qty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:			100128-2
0.0 = ±0.15		CHK:		REL:			
0.00 = ±0.10							
0.000 = ±0.005							
SURF. TEXTURE:							
REMOVE BURRS:							
BREAK SHARP EDGES							
R0.05 MAX. DO NOT							
SCALE PRINT:							