

LDC	-
DIST	-


4

3


2

1


- Notes:
- 1) Material (材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: Brass
Spring : Stainless steel wire
- 2) Plating:
1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3) Mechanical:
Force: 65±15gf per pin at 0.5mm stroke
85±20gf per pin at 0.8mm stroke
Total stroke(总行程): 1.00mm
Durability(寿命): 10,000 cycle min.
- 4) Electrical (电性能)
1) Contact resistance(接触阻抗): 50mOhm Max.
2) Voltage rating(额定电压): 36V DC Max
3) Current rating(额定电流): 2.0A

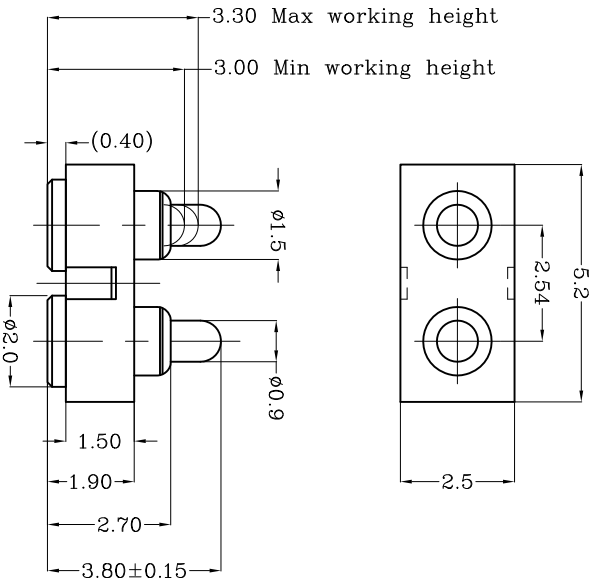

TOP-LINK



Recommended PCB Layout

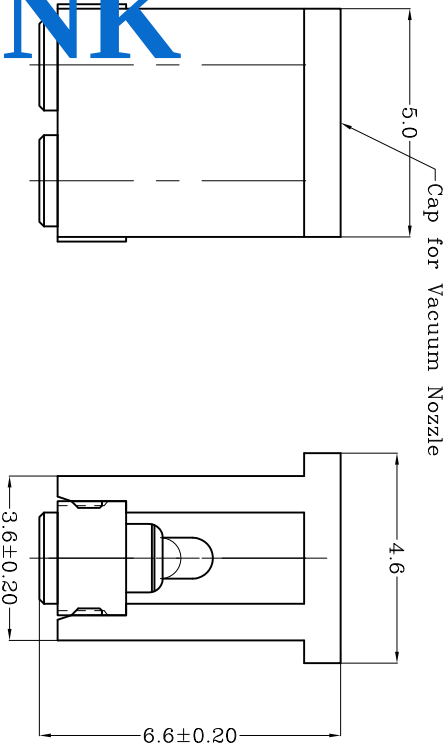

USED ON

-

100580-2
PART NUMBER

DIMENSIONS IN MM	TOLERANCES UNLESS OTHER SPECIFIED
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	

MATL	HT TR	FIN
DWN	APVD	
CHK	REL	

NAME	SCALE	A4	DWG	NO.	C-100580	SHEET	REV
PGGD CONNECTOR 2 POSITIONS	1:1	A4	DWG	NO.	C-100580	1 OF 1	3

A

B

C

D