
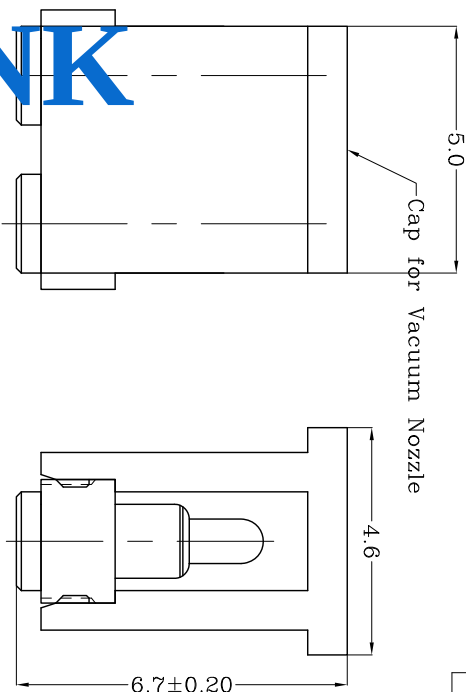
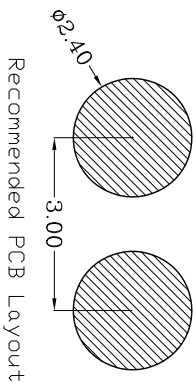


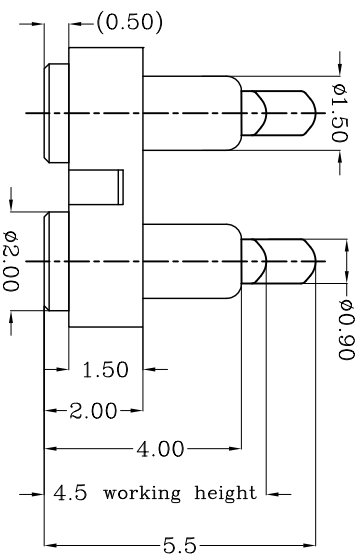

Material(1)

Housing: PA4.6 + 30% Glass fiber; UL94 V-0 Color Black

Contact: Brass

Spring : mass steel wire

2 Plating:

1)Body: 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 鍍 0.1um Min 鍍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金 0.4um Min 鍍底1.4um Min)

3 Mechanics

Total stroke(总行程): 1.40mm

Durability (X 10⁴ min): 10,000 cycle min.

4 Electrical (电性能)

Contact resistance(接触抵抗): 30mOhm Max

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

ANGLE: $\pm 1^\circ$

SURF TEXTURE: Δ 3/2
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

SCALE	A4	DWG NO.	C-100159	SHEET 1 OF 1	REV A
-------	----	---------	----------	--------------	-------

[illegible]