
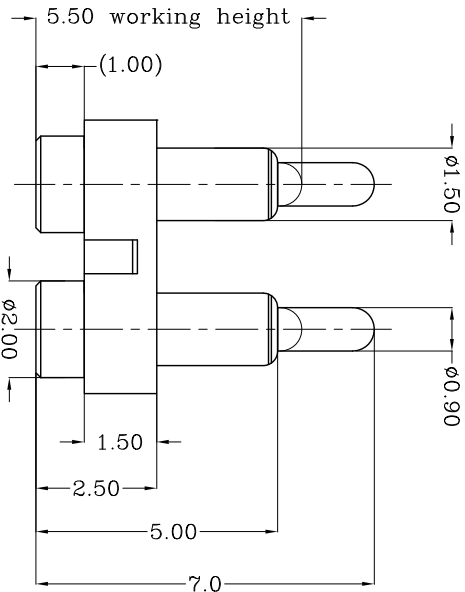
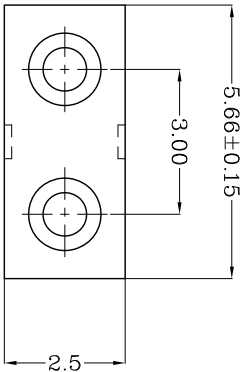



Recommended solder paste thickness is 0.10 mm

Recommended PCB Layout

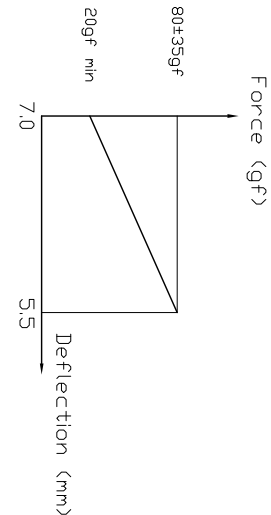

Notes:
1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black.

2 Mechanical demands:
Contact: Brass
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

TOP-LINK

USED ON

100483-2

PART NUMBER

A

B

C

D

LDC	-
DIST	-

NEW	2009/02/24
REVISION RECORD	APVD DATE
LTR	

DIMENSIONS IN MM	
TOLERANCES UNLESS	
OTHER SPECIFIED	
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK	
SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL	1	HT TR	—	FIN	—	✓
DWN	Qin	APVD	Lansing	Top-Link Electronics	Top-Link Electronics Ltd.	
CHK	Jin	REL				
NAME	BATTERY POGO CONNECTOR 2 POSITIONS					
SCALE	1:1	A4	DWG NO. C-100483	SHEET 1 OF 1	REV A	