

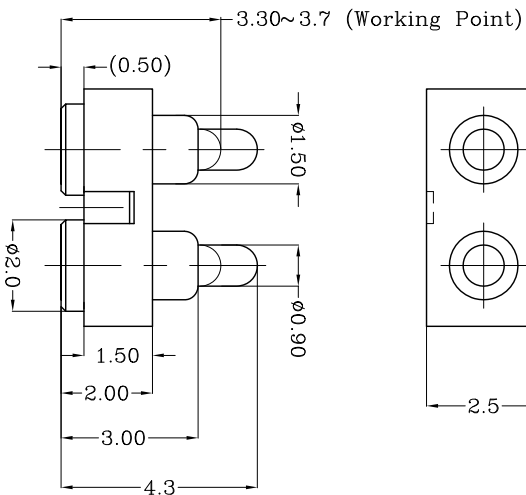

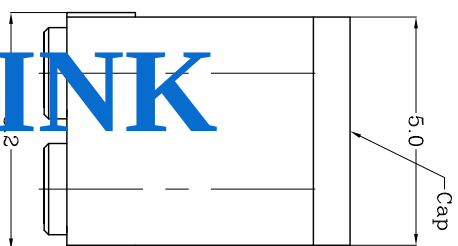


Recommended solder paste thickness is 0.10 mm

Recommended PCB Layout

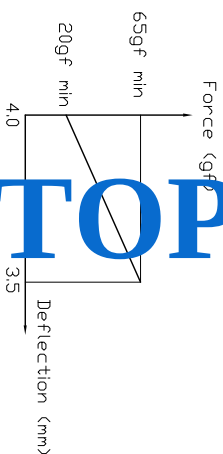

Cap for Vacuum Nozzle

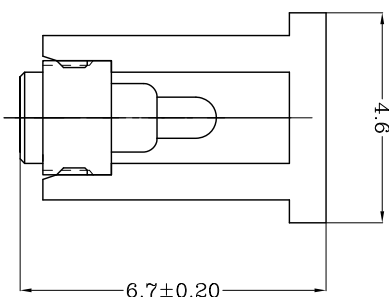

TOP-LINK

Notes:

¹ Material, Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

2 Mechanical demands:

Plating Plunger: 0.4um Au over 1.4um Ni

Plating Body: 0.1um Au over 1.4um Ni

	更新PCB尺寸		2010/07/12
	NEW		2008/12/02
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR		FIN	
0 = $\pm$ -		DWN	APVD	 Top-Link Electronics		
0.0 = $\pm$ 0.15						
0.00 = $\pm$ 0.10						
0.000 = $\pm$		CHK	REL	Top-Link Electronics Ltd		
ANGLE: $\pm$ 1°		NAME				
SURF TEXTURE: 32/ V		BATTERY POGO CONNECTOR 2 POSITIONS				
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		PGC-1.5-4.3-R-2P-2.54PH				
DO NOT SCALE PRINT		SCALE	A4	DWG NO:	SHEET 1 OF 1	REV B
		1:1		C-100266		

100266-2
PART NUMBER