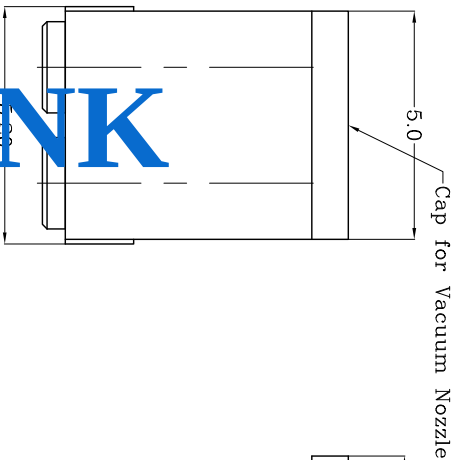
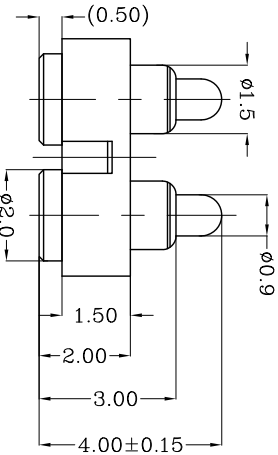




Notes:

1)Material(材质):
Housing: PA 4.6 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 0.90mm
Durability(寿命): 10,000 cycle min.

TOP-LINK

Recommended PCB Layout




Table 1 Mechanical performance

Max working height	3.50mm	110±25gf <2.1>
Min working height	3.20mm	140±35
Durability	10000cycle	

100593-2
PART NUMBER

MATL	HT	TR	FIN
DWN	APVD	REL	Top-Link Electronics L.td.

NAME	PGGD CONNECTOR 2 POSITIONS
SCALE	1:1
DATE	PGC-1.5-4.0-R-2P-2.54PH

REVISION	NEW
RECORD	APVD
DATE	2010/02/23

DIMENSIONS IN MM	0.00 = ±0.15
TOLERANCES UNLESS OTHER SPECIFIED	0.00 = ±0.10
ANGLE: ±1°	0.000 = ±
SURF TEXTURE: 32/	REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT