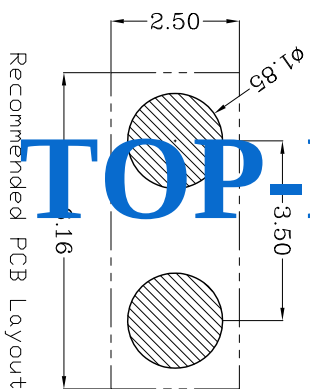
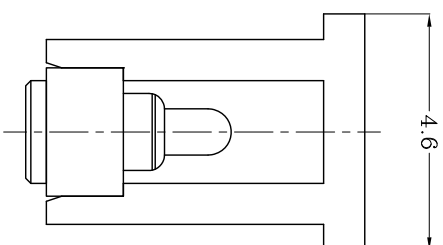
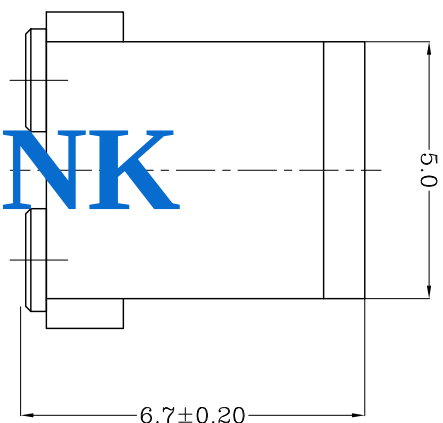
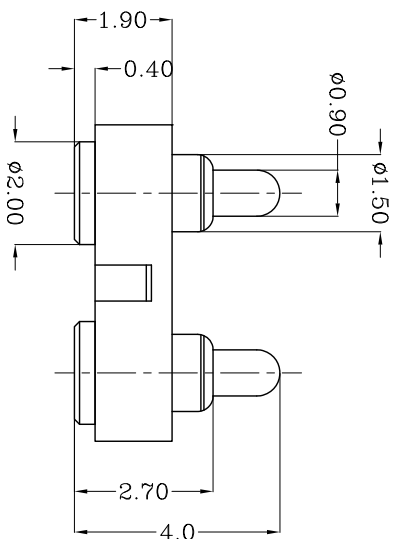
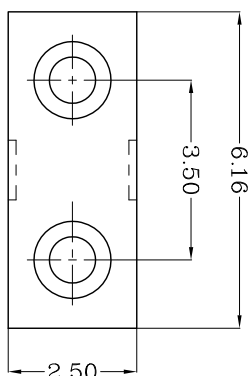


Recommended PCB Layout

TOP-LINK

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)

Contact: Brass

2 Mechanical demands:
Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

LDC	-
DIST	-

NEW	2008/10/29
LTR REVISION RECORD	APVD DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0	=	$\pm$	—
0.0	=	± 0.15	
0.00	=	± 0.10	
0.000	=	$\pm$	

ANGLE: $\pm 1^\circ$

SURF. TEXTURE: $3.2/\sqrt{\text{A}}$

REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAY
DO NOT SCALE PRINT

MATL		HT TR	—	FIN	— 
DVIN	Qin	APVD	Lansing	Top-Link Electronics	
CHK	Jim	REL	Top-Link Electronics Ltd		
NAME	BATTERY POGO CONNECTOR 2 POSITIONS PGC-1.5-4.0-R-2P-3.5PH				
SCALE	A4	DWG NO.	C-100419	SHEET	REV
1:1				1 OF 1	A

100419-2
PART NUMBER

USED ON
1