

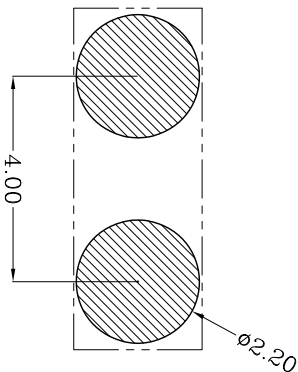
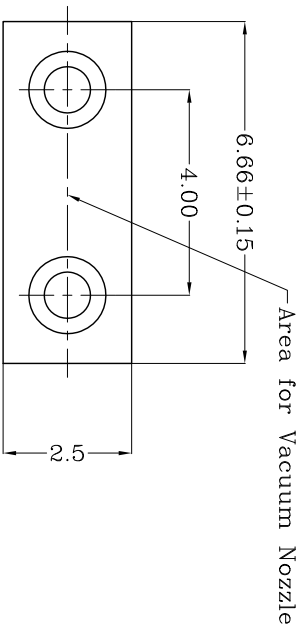


DWG NO.
C-100155



Recommended solder patse thickness is 0.10 mm
Recommended PCB Layout

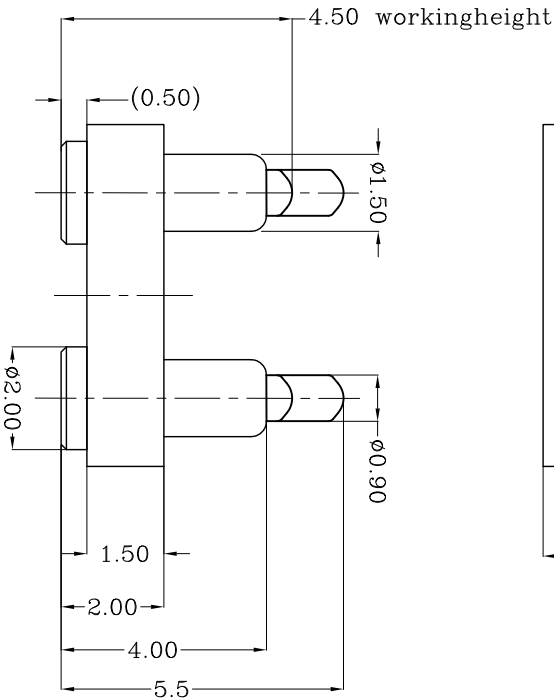

Notes:
1)Material(材质):
Housing: PA 46 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

- 2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镀底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镀底1.4um Min)

TOP-LINK

USED ON
-

LDC	-
DIST	-

	update remark		2007/12/26
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	REL
CHK	REL	REL
NAME	PGGD	CONNECTOR 2 POSITIONS
SCALE	A4	DWG NO. C-100155
1:1	A4	ND. C-100155
SHEET	1 OF 1	REV A

100155-2
PART NUMBER

Top-Link
Electronics Ltd.