




DWG NO. C-100300

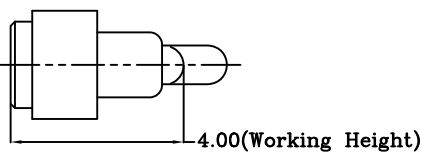

Recommended PCB Layout

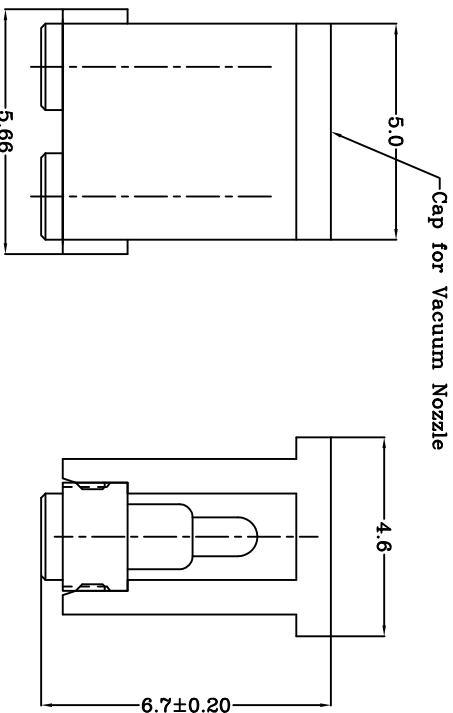

TOP-LINK

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

Durability(寿命): 10,000 cycle min.

Current rating(额定电流): 2.0A

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED					MATL		HT TR	—	FIN	— 
0	= ±		DVN		APVD					
0.0	= ±0.15		Qln							
0.00	= ±0.10		CHK		REL					
0.000	= ±									
ANGLE: ±1°										
SURF. TEXTURE: 32/										
REMOVE BURRS, BREAK										
SHARP EDGES, R0.05 MAX										
DO NOT SCALE PRINT										
NAME			PGGD CONNECTOR 2 POSITIONS							
			PGC-1.5-5.0-R-2P-3.0PH							
SCALE	A4	DWG NO.	C-100300				SHEET	1 OF 1	REV	A
1:1										

100300-2
PART NUMBER

USED ON