
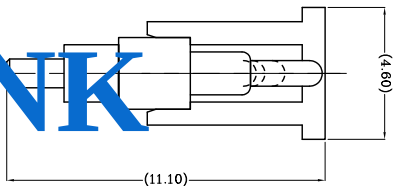


	DWN No.: C-100954
---	----------------------

Technical drawing of a rectangular plate with four circular holes. The plate has a width of 2.5 and a total height of 10.2. The four holes are arranged in a vertical line. The two outer holes have an outer diameter of 1.0 and an inner diameter of 0.5. The two inner holes have a diameter of 1.0. The distance between the centers of the two outer holes is 7.62.

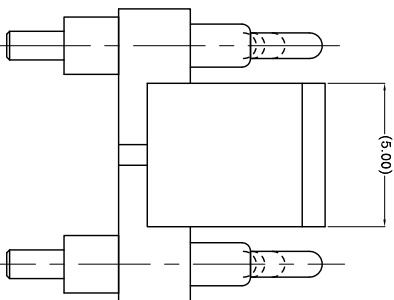


Item	Part name	Q'ty/Ea ¹	Material	Finish
1	HSG	1	PA46 UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	PA46 UL94 V-0 Color Black	_____

Table 1 Mechanical performance

Table 1 Mechanical performance		
working height	7.00mm	80gf Min
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

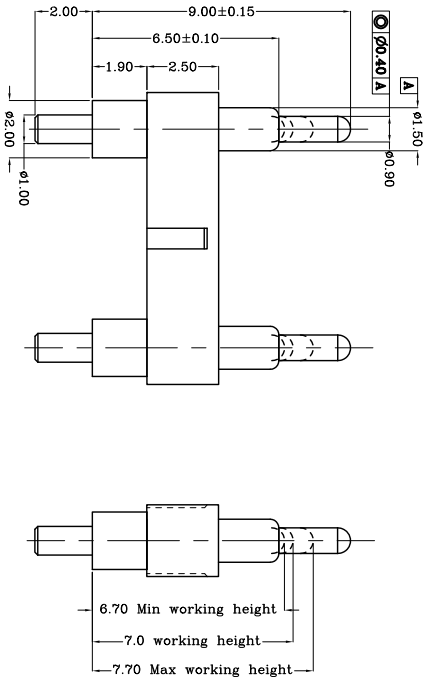

TOP-LINK

Top-Link Electronics Ltd.	Type	Unit	Weight
	Customer drawing	mm	

DWN:	APVD:	<i>top-link</i> <i>Electronics</i>	Top-link Electronics Ltd.
Gui zhiguo			
CHK:	REL:		

Name	Pogo pin connector
------	--------------------

Scale	Size	DWG No.	Page	Rev.
1:1	A4	C-100954	1/1	1

4

3

2

1