
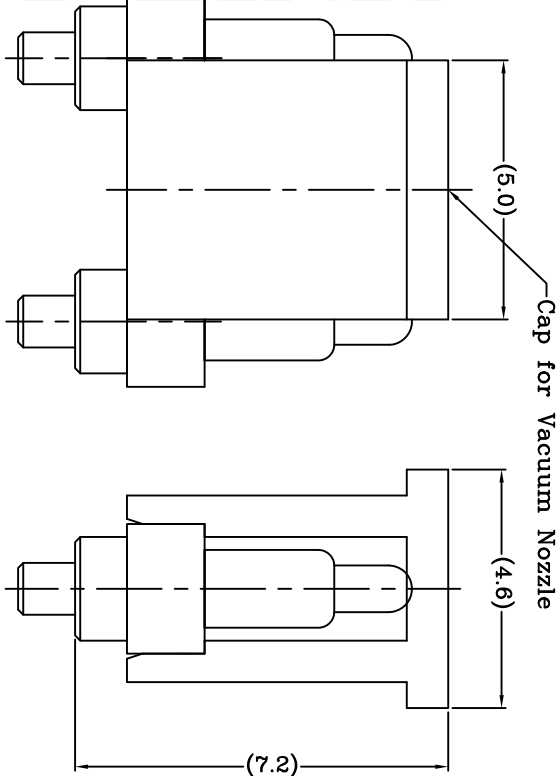
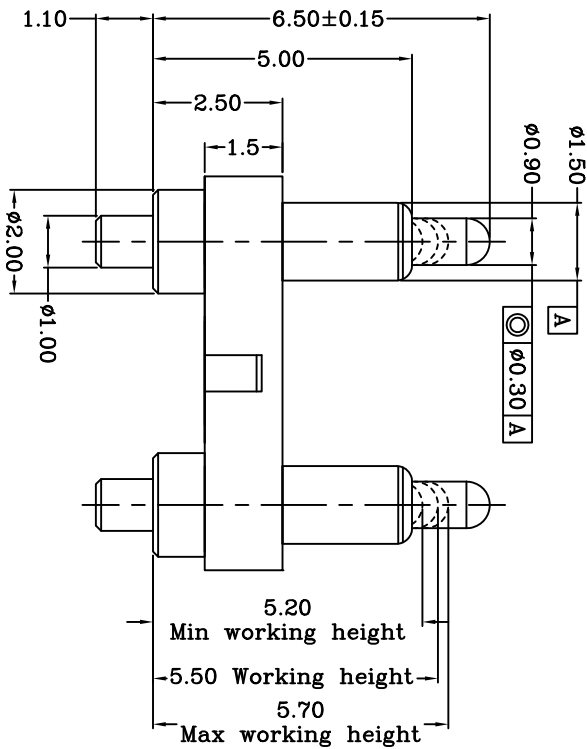


proposal

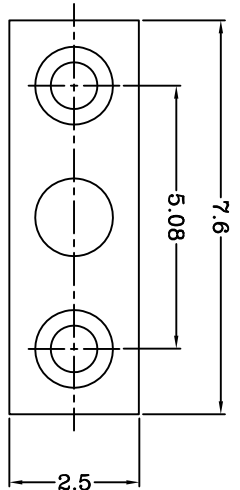

TOP-LINK

Notes:

¹ Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2>Warning: Working height are not permitted to be less

than Min working height.

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

4 Packaging specification conforms to EIA 481

5 RoHS compliant.

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp,Plastic UL94 V-0 Color Black	————
2	Body	2	Leaded Brass	Min Au 0.1um over min Ni 1.4um
3	Plunger	2	Leoded Brass	Min Au 0.4um over min Ni 1.4um
4	Spring	2	Stainless steel wire	————
5	CAP	1	High temp,Plastic	————

Table 1 Mechanical performance		
Working height	5.50mm	125±30gf
Durability	10000cycle	

10101021571
PART NUMBER

Type	Unit	Weight
Customer drawing	mm	_____

DWN: Cai wanlu	APVD:
CHK:	REL:

Top-Link
Electronics

Top-Link
 Electronics Ltd.

Name	
Customer drawing	

Scale 1:1	Size A4	DWG No. C-10101021571	Page 1/1	Rev. 1
--------------	------------	--------------------------	-------------	-----------

4

3

2

1