


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-100218

LDC
-
DIST
-


4

3

2



1

Notes:
1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Spring force: 12±0.30N/-0.20N with 12mm stroke.
Full stroke: 14mm
Plating Plunger: 0.4um Au over 14um Ni
Plating Body: 0.1um Au over 14um Ni.

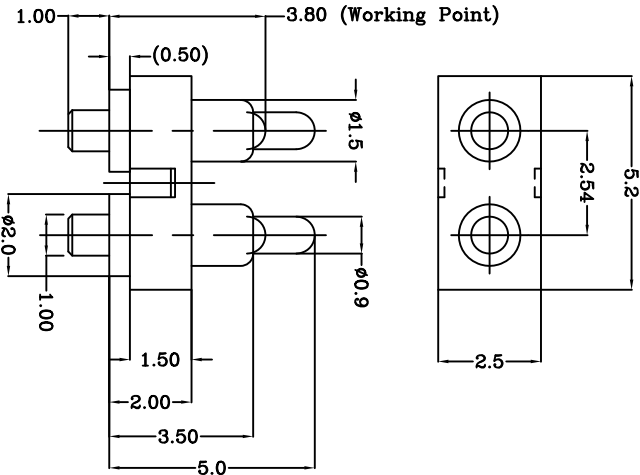

TOP-LINK

Recommended PCB Layout

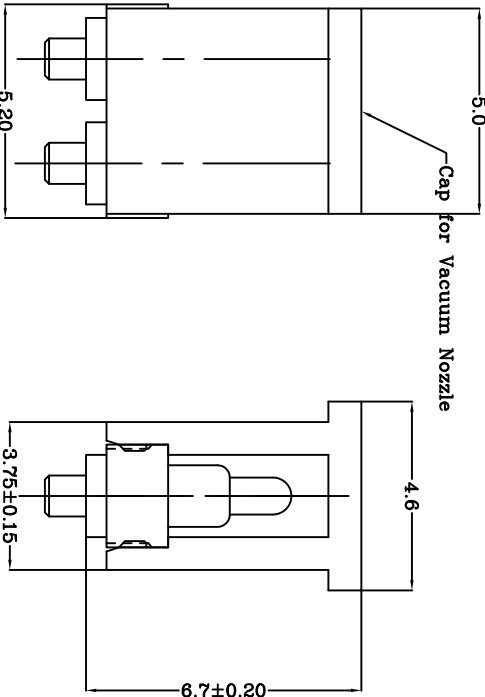

USED ON

-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL		HT TR		FIN	
0	= ±			DWN	1				
0.0	= ±0.15			Benny		APVD	Lansing		
0.00	= ±0.10			CHK			REL		
0.000	= ±			Andy					
SURF TEXTURE: 32/ ANGLE: ±1°				NAME		POGO CONNECTOR 2 POSITIONS		PART NUMBER	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT				BATTERY		PGC-1.5-5.0-R-2P-2.54PH		100218-2	
SCALE 1:1				A4		DWG NO. C-100218		SHEET 1 OF 1	
								REV B	

Top-Link
Electronics Ltd.

A

B

C

D