
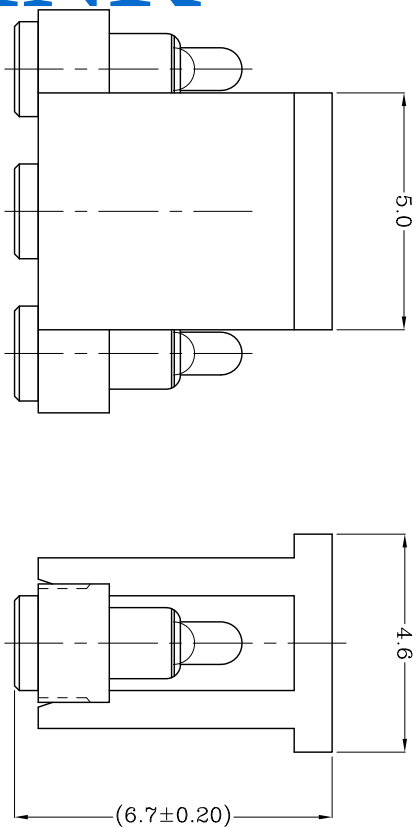
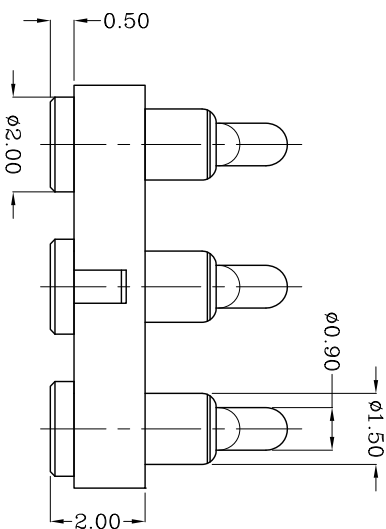


TOP-LINK

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)

Contact: Brass

2 Mechanical demands:

Plating Plunger: Min 0.4um Au over 1.4um Ni.
Plating Body: Min 0.1um Au over 1.4um Ni.

3 Electrical

a) Contact resistance: 30mOhm Max.

b) Current rating: 2.0A

c) Operating voltage: 36VDC

d) Force: 150 ± 30 gf per pin at 1.00mm stroke

	NEW		2012/05/25
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM		MATL	HT	TR	FIN
TOLERANCES UNLESS OTHER SPECIFIED			—		
0	= ±—	DWN	APVD		
0.0	= ±0.15	Qin			
0.00	= ±0.10	CHK	REL		
0.000	= ±				
ANGLE: ±1°					
SURF. TEXTURE: 32/ 					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX					
DO NOT SCALE PRINT					
NAME					
POGD 3P					
PGC-1.5-5.0-R-3P-3.0PH					
SCALE	A4	DWG NO.	C-100418	SHEET 1 OF 1	REV B

100418-3
PART NUMBER