
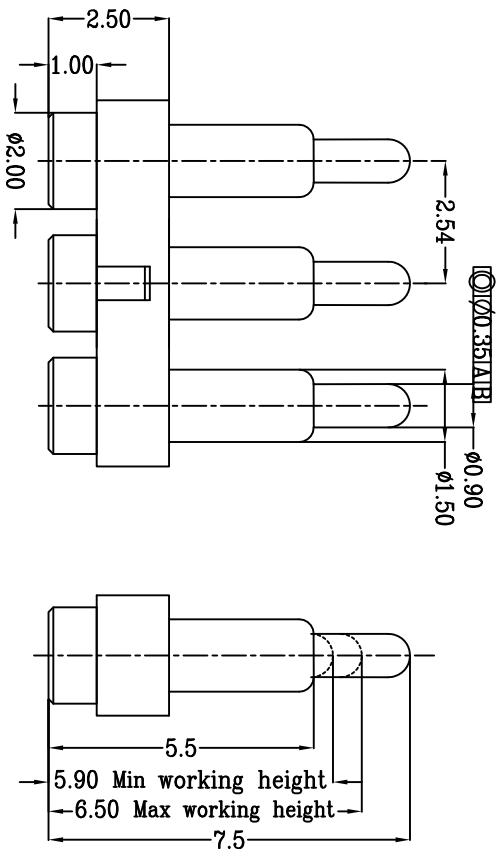


	DWN No.: C-110317
---	----------------------

Recommended PCB Layout

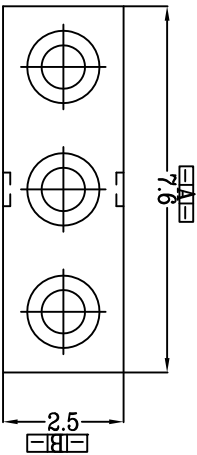

TOP-LINK

Notes:

¹ Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1>The force is the average of forces obtained when plunger

goes downwards and upwards.

<2.2>Warning:Working height are not permitted to be less

Min working height.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 2.0A

5 RoHS compliant.

Item	Part name	Q'ty/Ea	Material	Finish
1	HSG	1	High temp Plastic U194 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
Max working height	6.50mm	80gf min<2.1>
Min working height	5.80mm	165±35
Durability	10000cycle	

110317-3
PART NUMBER

Type	Unit	Weight
Customer drawing	mm	

Top-Link
electronics Ltd.

FRANCES UNLESS
OTHER SPECIFIED

$$\begin{array}{c} \vdots \\ = \\ = \\ + \\ - \\ 015 \end{array}$$

$\frac{0}{1} = \frac{0.10}{0.10}$

File: $\pm 1^{\circ}$

MOVE BURRS.
RAV SHARP EDGES

05 MAX.DO NOT

2

Top-Link
Electronics Ltd

Top-Link
Electronics Ltd.

4

ω

2

1