
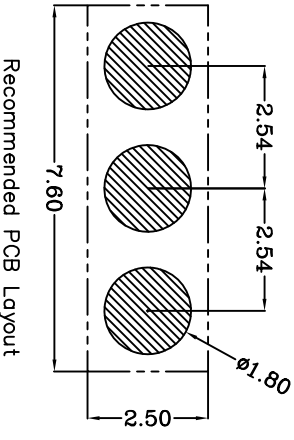
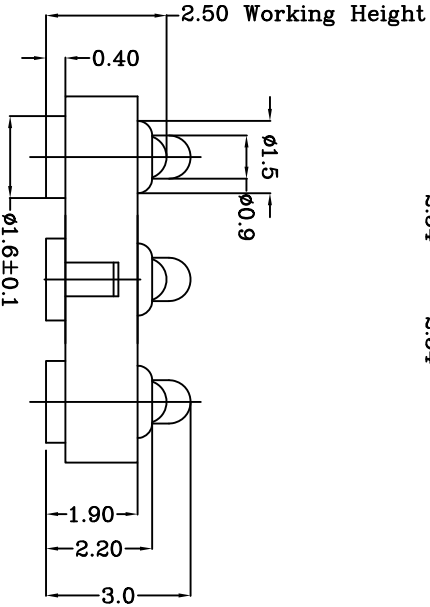


proposal

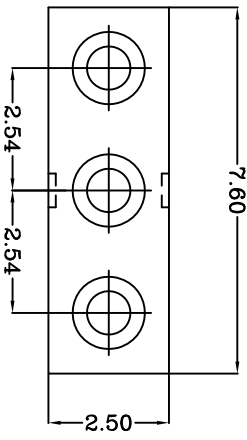

Cap for Vacuum Nozzle

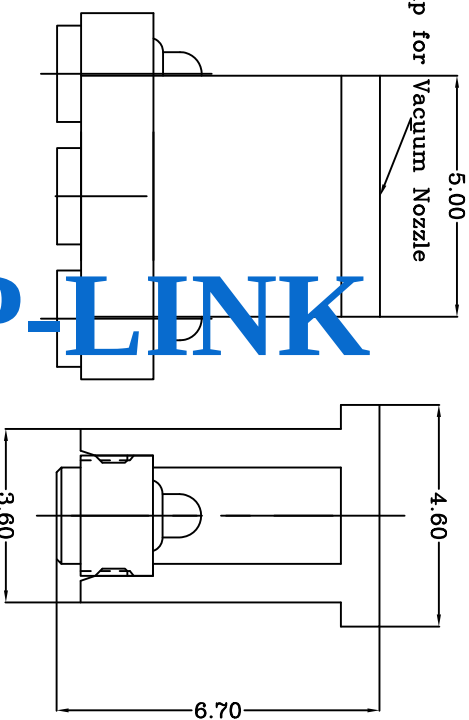


Table 1 Mechanical performance		
working height	2.50mm	90gf min<2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - 3 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
 - Resistance: 50mOhm Max.
 - Current rating: 2.0A
 - 4 Packaging Specification conforms to EIA 481
 - 5 RoHS compliant.

TOP-LINK

DIST

Rev.	NEW	2013/08/21
Revision record.		Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	JERRY	APVD:			
0.0 = ± 0.15		CHK:		REL:			
0.00 = ± 0.10		Name					
0.000 = ± 0.005		POGO PIN CONNECTOR					
SURF. TEXTURE:		Scale					
REMOVE SHARP EDGES		1:1		Size		DWG No.	
BREAK SHARP EDGES				A4		C-100351	
SCALE PRINT.						Page	
						1/1	
						Rev.	
						A1	

Top-Link Electronics Ltd.