
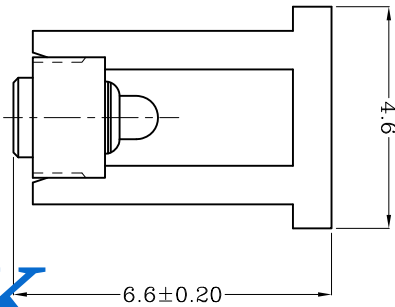
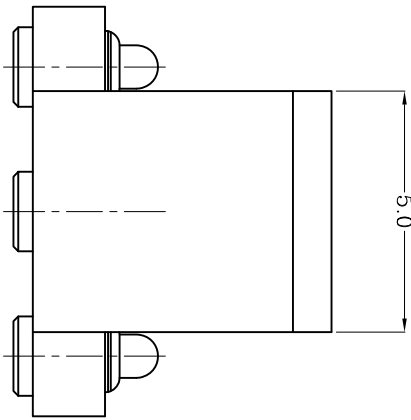
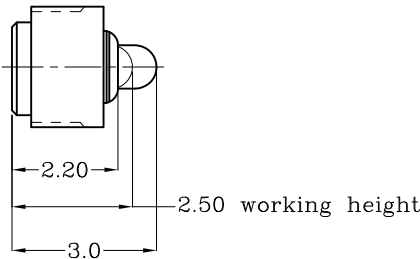


Recommended PCB Layout

Table 1 Mechanical performance		
working height	2.50mm	90gf min<2.1>
Durability	20000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
- 4 Resistance:30mOhm Max.Current rating: 2.0A
- 5 Packaging Spec.Comformance to EIA 481
- 6 RoHS compliant.

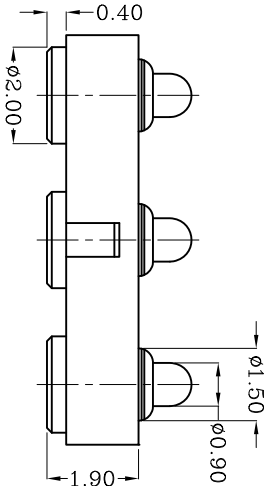

TOP-LINK

Top-Link Electronics Ltd.		Type		Unit		Weight	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing		mm		PART NUMBER	
0.0 = ±0.15		DWN: Qin Zuozhong		APVD:		100255-3	
0.00 = ±0.10		CHK:		REL:		PART NUMBER	
0.000 = ±0.005		Name		Customer drawing		PGC-1.5-3.0-R-3P-3.0PH	
SURF TEXTURE: REMOVE BURRS.		Scale		Size		DWG No.	
BREAK SHARP EDGES		1:1		A4		C-100255	
SCALE PRINT.		Page		1/1		Rev. 1	

Top-Link Electronics Ltd.