
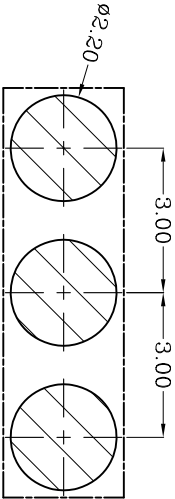
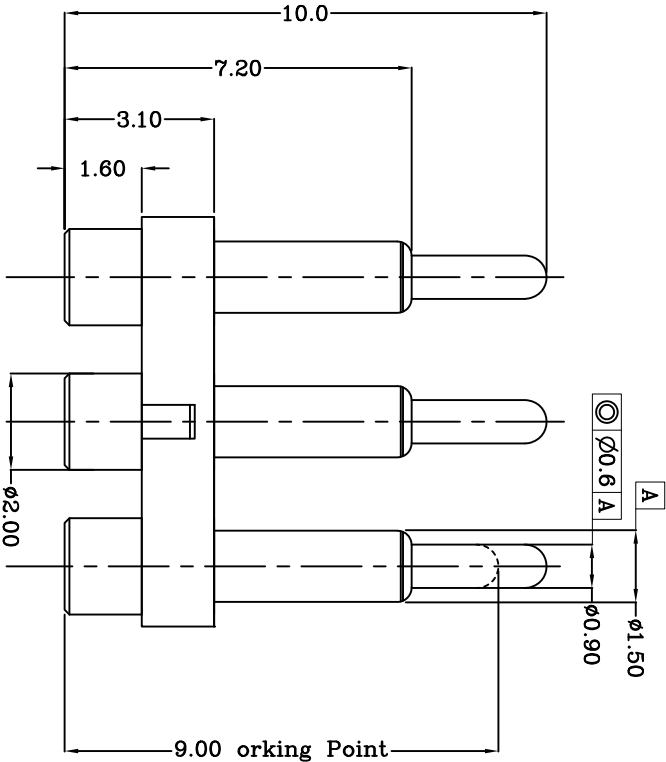


DWN No.:
C-110530

proposal

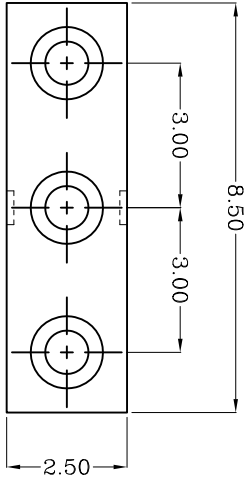

TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Table 1 Mechanical performance		
Max. working height	9.0mm	100±25gf <2.1>
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 Packaging specification conforms to EIA 481
 - 5 RoHS compliant.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:		Top-Link Electronics Top-Link Electronics Ltd.
0.0 = ±0.15		CHK:		REL:		
0.00 = ±0.10						
0.000 = ±0.05		Name				
Angle: ±1°		Pogo pin connector				
SURF. TEXTURE: REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX. DO NOT SCALE PRINT.						
Scale	Size	DWG No.	Page		Rev.	
1:1	A4	C-110530	1/1		1	

Rev.	Revision record.	Date.
1		
2		
3		
4		