
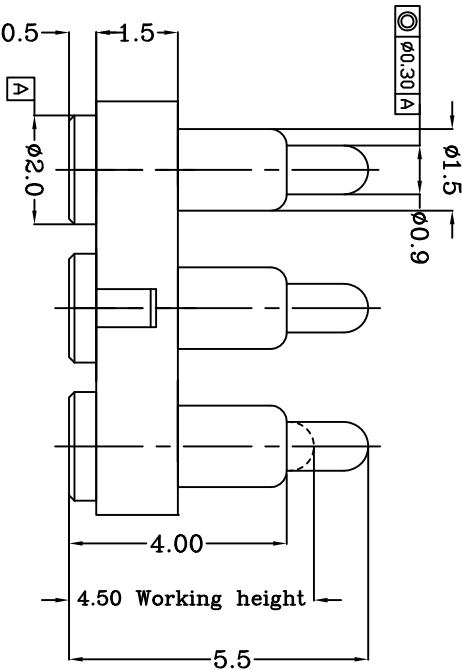



proposal

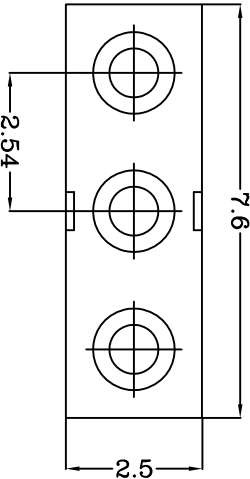

Notes:

- 1 Demensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 200mOhm Max.Current rating: 1.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

TOP-LINK

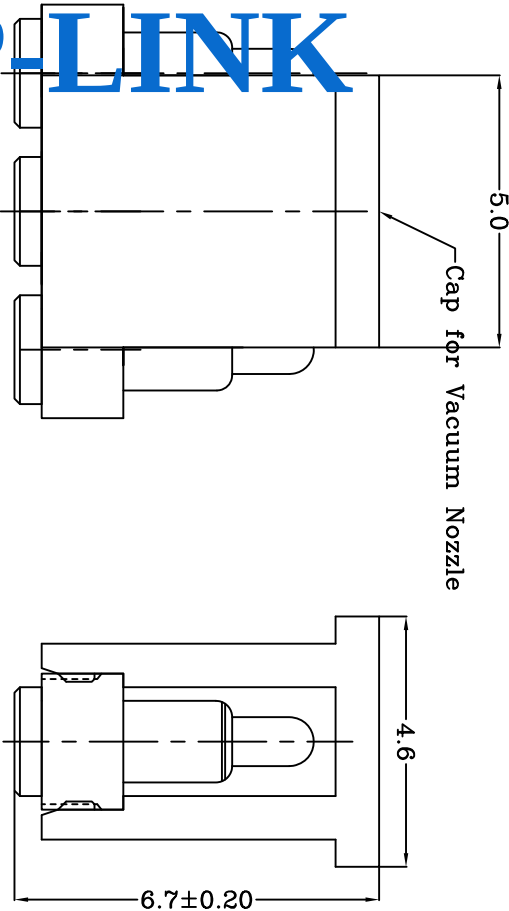

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance

Working height	4.50mm	35±15gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	PART NUMBER		
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:			100773-3		
0.0 = ±0.15		CHK:		REL:					
0.00 = ±0.10		Name Customer drawing							
0.000 = ±0.05									
Angle: ±1°									
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.									
Scale	1:1	Size	A4	DWG No.	C-100773	Page	1/1	Rev.	A

Top-Link Electronics
Top-Link Electronics Ltd.

DIST

Rev.	NEW	2011/12/28
Revision record.		
Date.		