



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:

C-10101031148

proposal

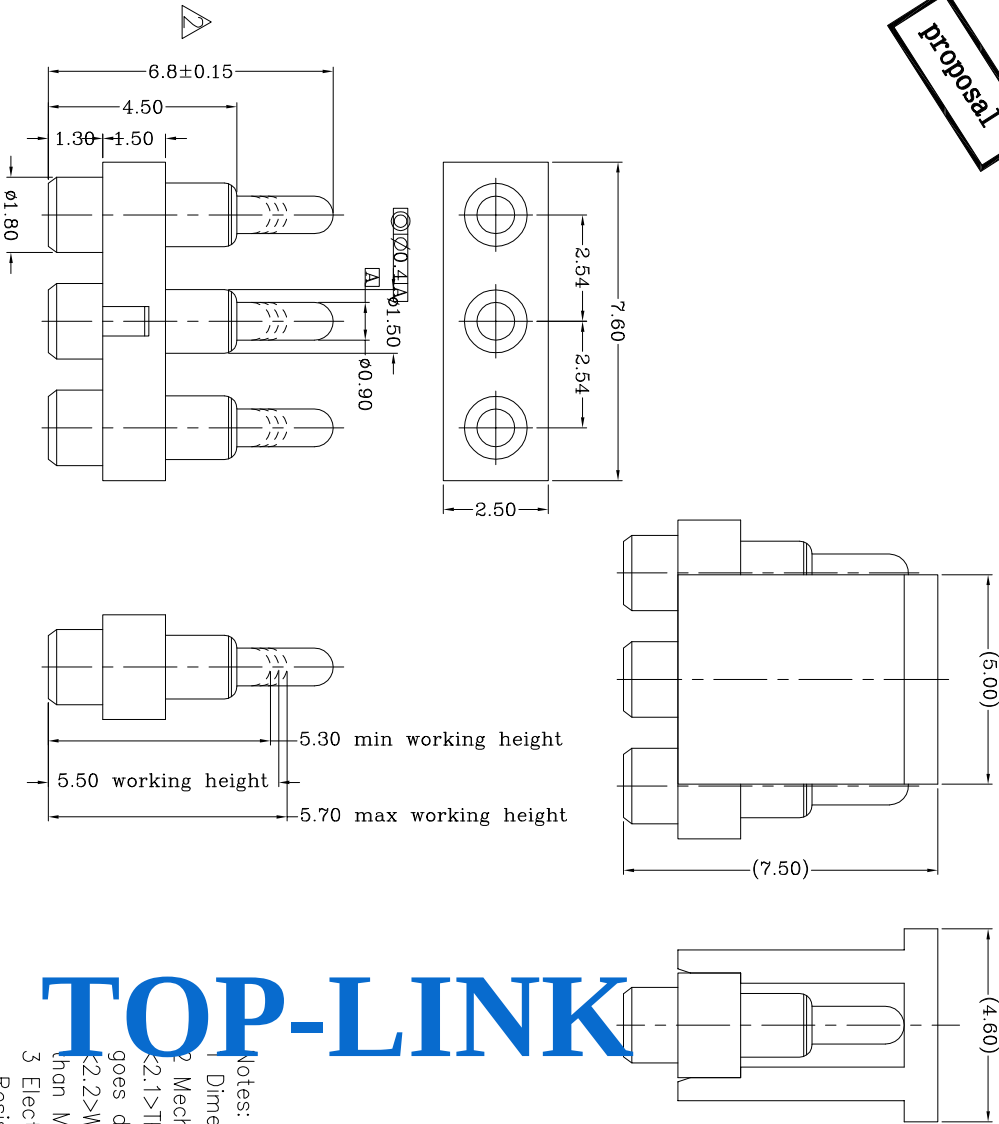

TOP-LINK

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
- Packaging specification conforms to EIA 481
- RoHS compliant.

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
working height	5.50mm	90gf min <2.1>
Durability	10000cycle	

DIST

2 change tolerance

1 NEW

Rev. Revision record.

Date.

Top-Link Electronics Ltd.			
Type	Customer drawing	Unit	mm
DWN:	Gui zhiguo	APVD:	
CHK:		REL:	
Name	Pogo pin connector		
Scale	1:1	Size	A4
DWG No.	C-10101031148		
Page	1/1		
Rev.	2		

10101031148
PART NUMBER

Top-Link
Electronics
Electronics Ltd.