

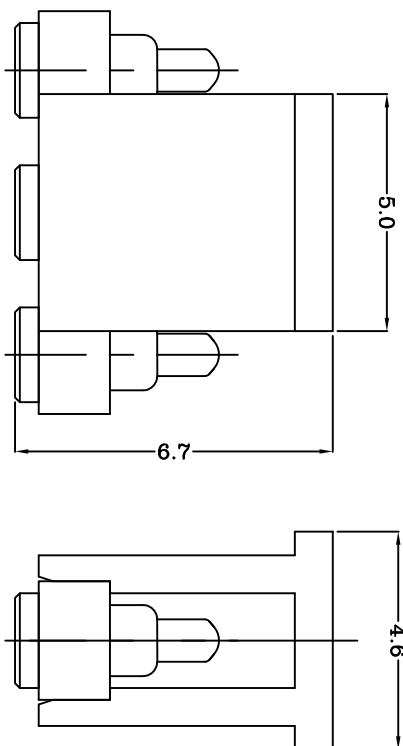
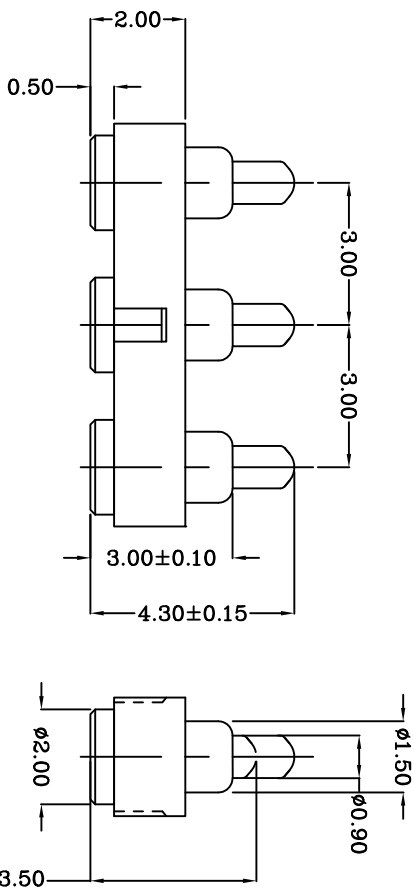


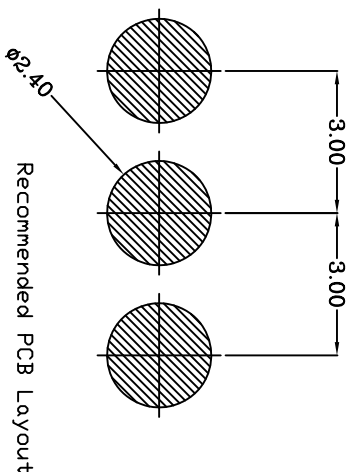

```
working height3.50
```

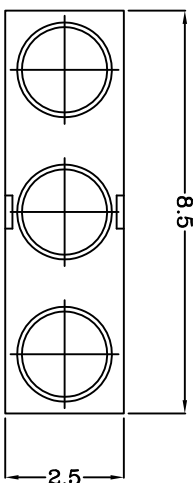

Recommended PCB Layout

100110-3

zyperalting voltage: 50 VDC
Spring force: 120±25af at 0.8mm stroke

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR	FIN
0	= ±	DVN	APVD	△ Top-Link Electronics Top-Link Electronics Ltd.
0.0	= ±0.15	Benny	Lansing	
0.00	= ±0.10	CHK	REL	
0.000	= ±	Andy		
ANGLE: ±1°				
SURF TEXTURE: 32/		NAME PGGD 3P		
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		PGC-1.5-4.3-R-3P-3.0PH		
DD NOT SCALE PRINT	SCALE	A4	DWG NO. C-100110	SHEET 1 OF 1
	1:1			REV A

100110-3
PART NUMBER