
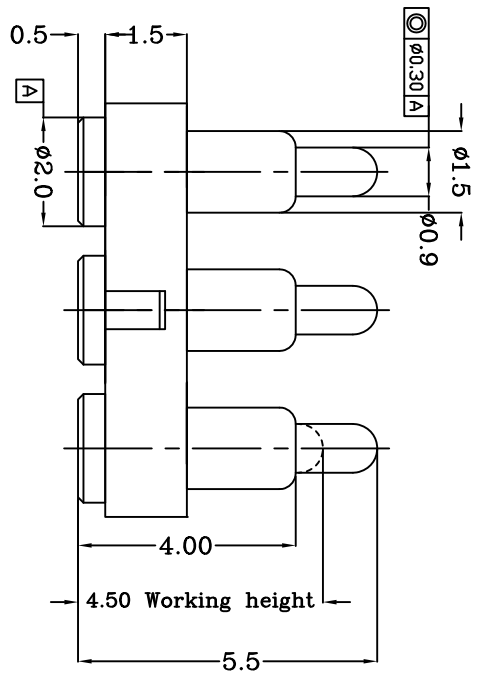



proposal

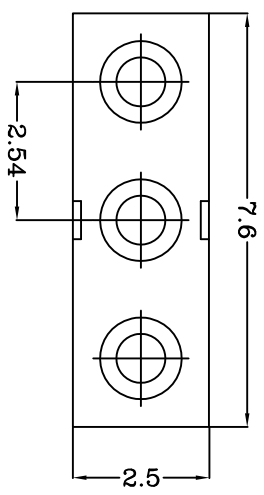

Notes:

- 1 Demensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
- Resistance: 50mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

TOP-LINK

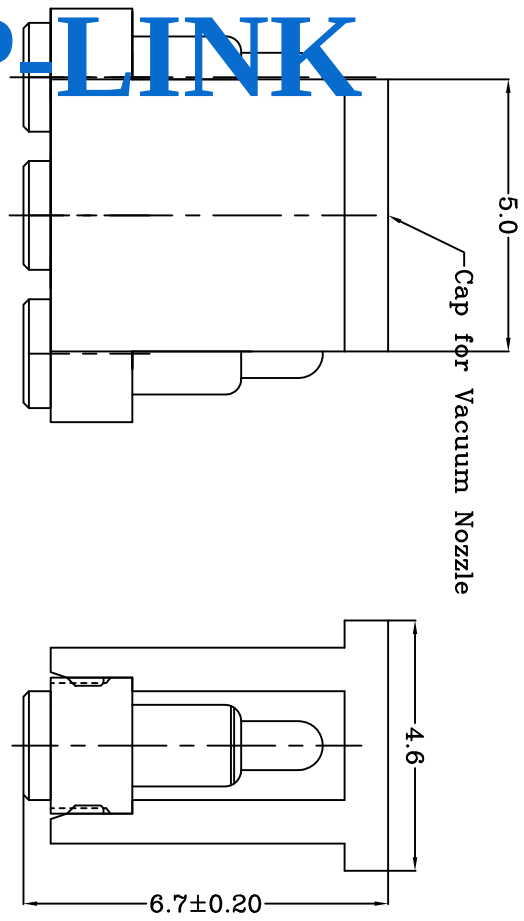

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Working height	4.50mm	75±25gf <2.1>
Durability	10000cycle	

DIST

4

3

2

1

Rev.	NEW	2011/12/28
Revision record.		
Date.		

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		100774-3	
0.0 = ±0.15	DWN:	APVD:				
0.00 = ±0.10	Qin Zuozhong	REL:				
0.000 = ±0.05	CHK:					
Angle: ±1°	Name		Customer drawing			
SURF. TEXTURE:						
REMOVE BURRS:						
BREAK SHARP EDGES						
R0.05 MAX:DO NOT						
SCALE PRINT.						
Scale 1:1	Size A4	DWG No.	C-100774	Page 1/1	Rev. 1	

Top-Link Electronics
Top-Link Electronics Ltd.