



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.





DWG NO.
C-100172

LDC
-
DIST
-

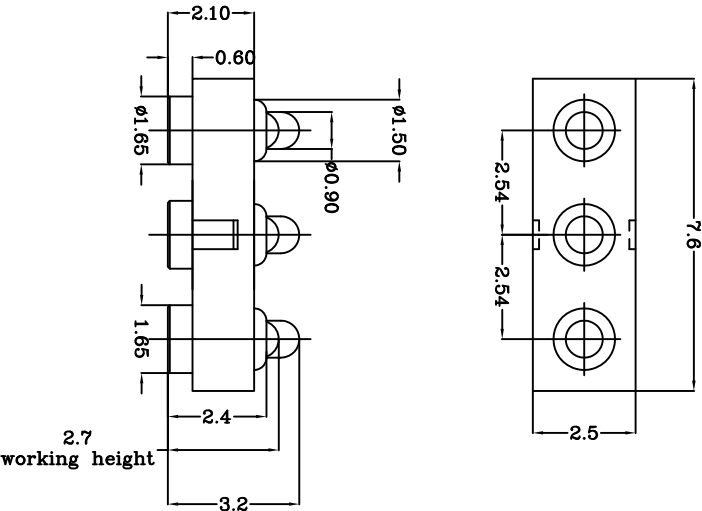

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Contact: Brass
Color: Black.
2 Mechanical demands:
Plating Plunger: 0.4um Au over 1.25um Ni
Plating Body: 0.1um Au over 1.25um Ni.

TOP-LINK

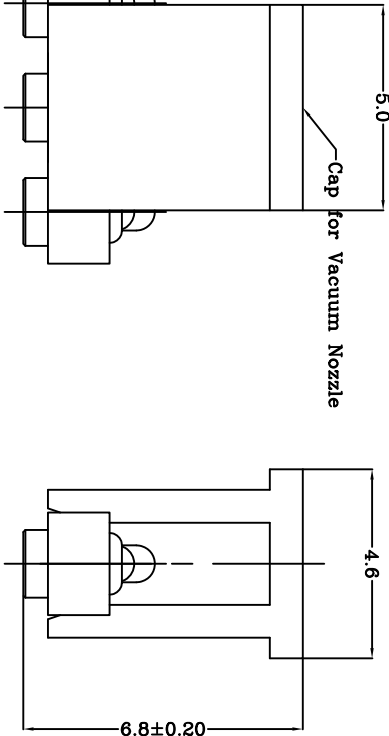

Recommended Solder Paste thickness is 0.10 mm

Recommended PCB Layout

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ±	-		DWN	APVD	Lansing	Top-Link Electronics	Top-Link Electronics Ltd.							
0.0	= ±0.15			CHK	REL										
0.00	= ±0.10			Jim											
0.000	= ±			NAME	BATTERY	POGO CONNECTOR 3 POSITIONS									
ANGLE: ±1°				SCALE	1:1	A4	DWG	NO.	C-100172	SHEET	1 OF 1	REV	B		
SURF TEXTURE: 32/															
REMOVE BURRS, BREAK															
SHARP EDGES R0.05 MAX															
DD NOT SCALE PRINT															

USED ON

-