


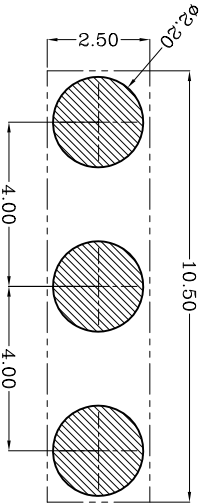
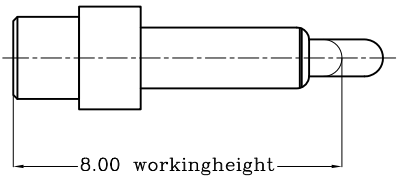


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

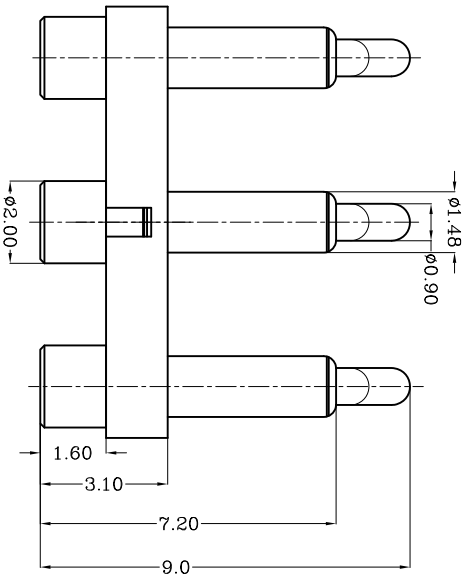

DWG NO.
C-110755

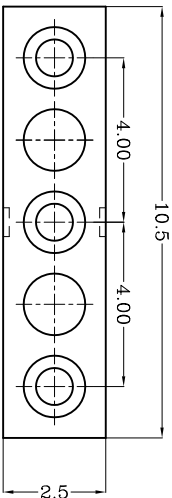

Recommended PCB Layout

TOP-LINK

Notes:

Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring :Stainless steel wire

2 Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

Mechanical(机械性能):

1)Total stroke(总行程) : 1.50mm

2)Durability(寿命): 10,000 cycle min.

Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

USED ON

-

110755-3
PART NUMBER

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			

MATL	HT TR	FIN
DWN	APVD	
CHK	REL	

NAME POGO PIN CONNECTOR 3 POSITIONS

SCALE	A4	DWG NO.	SHEET	REV
1:1	A4	C-110755	1 OF 1	2

NEW	REVISION RECORD	APVD	DATE
LTR			

LDC	DIST
-	-

4

3

2

1