


DWG NO.
C-101409

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

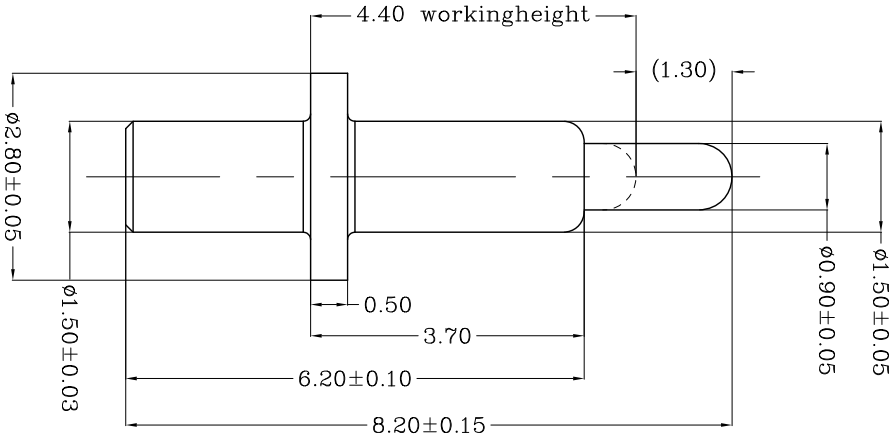

Notes:
△ Material(材质):

1)Body : Brass

2)Plunger : Brass

3)Plunger : Stainless steel wire
2)Plating(电镀):

1)Body: 0.1um Gold plating over 1.4 Nickel plating

(Body: 镀金0.1um 镍底1.4um)

2)Plunger: Min 0.4um Gold plating over 1.4um Nickel plating

(Plunger: 镀金0.4um 镍底1.4um)

3)Plunger: 镀金0.4um 镍底1.4um)

1)Force: 110±25gf per pin at 1.3mm stroke

(力: 下压1.3mm的力: 110±25gf)

2)Total stroke(总行程) : 2.00mm

3)Durability(寿命): 10,000 cycle min.

4)Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

USED ON

-

101409-1

PART NUMBER

MATL	HT TR	FIN
△	—	—

DWN	APVD	REL
Qin		
CHK		

Top-Link
Electronics
Electronics Ltd.

NAME
PGGD PIN

SCALE
1:1

A4

DWG NO.
C-101409

SHEET
1 OF 1

修改电镀规格

NEW

REVISION
RECORD

APVD

DATE

2010/07/02

2009/12/10

REVISION
RECORD

APVD

DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.10
0.00 = ±0.05
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

TOP LINK

4

3

2

1