

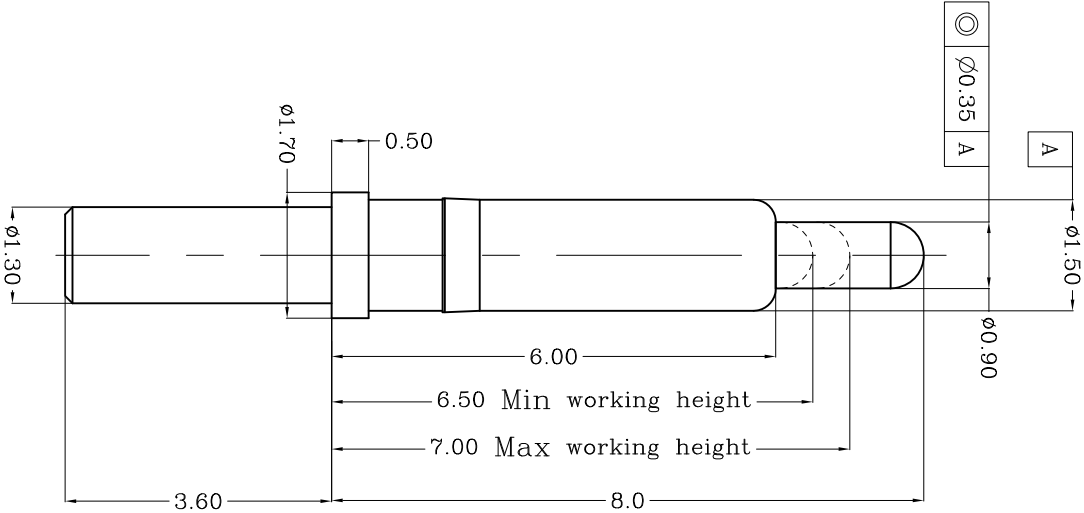



Table 1 Mechanical performance		
Max working height	7.00mm	80gf min <2.1>
Min working height	6.50mm	200gf Max
Durability	10000cycle	

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

	Update	2012/10/09
	NEW	2012/09/26
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm		Weight			
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	APVD:		Top-Link Electronics Ltd.						
0.0 = ± 0.15		CHK:		REL:							
0.00 = ± 0.10		Name		POCO PIN							
0.000 = ± 0.005											
Angle: ±1°		SURF. TEXTURE:									
REMOVE BURRS.		BREAK SHARP EDGES									
R0.05 MAX.DO NOT SCALE PRINT.		Scale		Size		DWG No.		Page		Rev.	
		1:1		A4		C-101666		1/1		B	

101666-1
PART NUMBER