




DIST

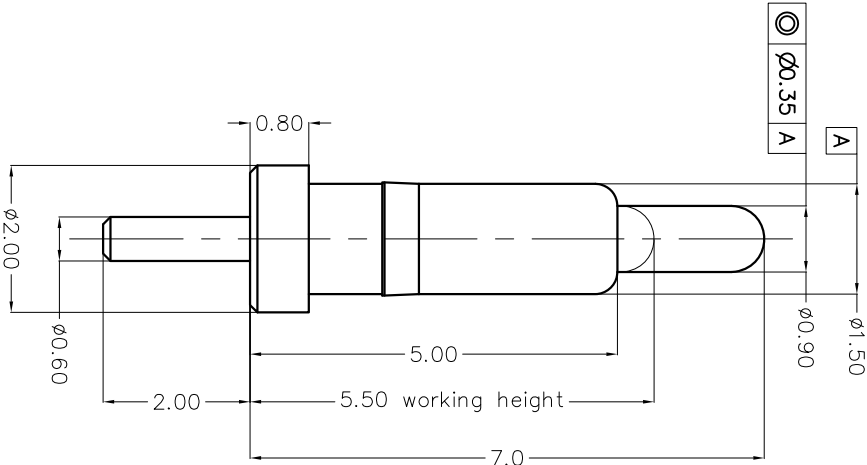

TOP LINK

Not
1 Demnnsions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1> Stroke force is the average of forces obtained when plunger goes downwards and upwards.
<2.2> Total stroke : 1.9mm.
3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
4 RoHS compliant.

Table 1 Mechanical performance		
working height	5.50mm	80±35gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leoded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Qin zuozhong	APVD:		
0.0 = ±0.15	CHK:		REL:		
0.00 = ±0.10	Name	POGO PIN			
0.000 = ±0.05	Angle: ±1°				
SURF. TEXTURE: REMOVE BURRS.	BREAK SHARP EDGES				
SCALE PRINT.	Scale	1:1	Size	A4	DWG No.
					C-101568
					Page 1/1
					Rev. 1

Top-Link Electronics
Top-Link Electronics Ltd.

101568-1
PART NUMBER