


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101266

proposal

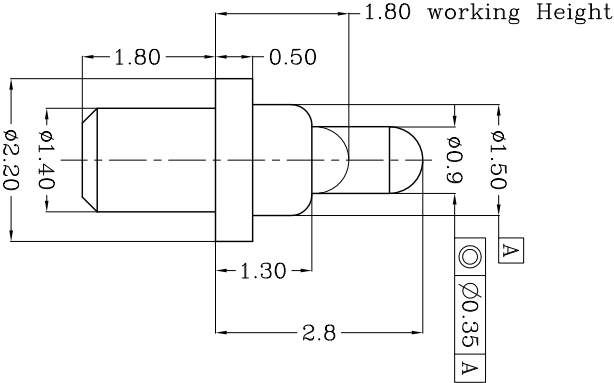


Table 1 Mechanical performance		
working height	1.80mm	100±25gf <2.1>
Durability	10000cycle	

- Not
- 1 Demnisions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Total stroke : 1.1mm.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 Remo compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leoded Brass	Au 0.1um plating over Ni 1.4um
2	Plunger	1	Leoded Brass	Au 0.4um plating over Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Unit		Weight			
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		PART NUMBER			
0.0 = ±0.15	DWN:	Qin zuozhong	APVD:	Top-Link Electronics Ltd.				
0.00 = ±0.10	CHK:	REL:						
0.000 = ±0.005	Angle: ±1°	Name		POGO PIN				
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Scale	Size	DWG No.	Page	Rev.		
		1:1	A4	C-101266	1/1	D		

DIST

4

3

2

1