


DWG NO.
C-101124

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

USED ON
—

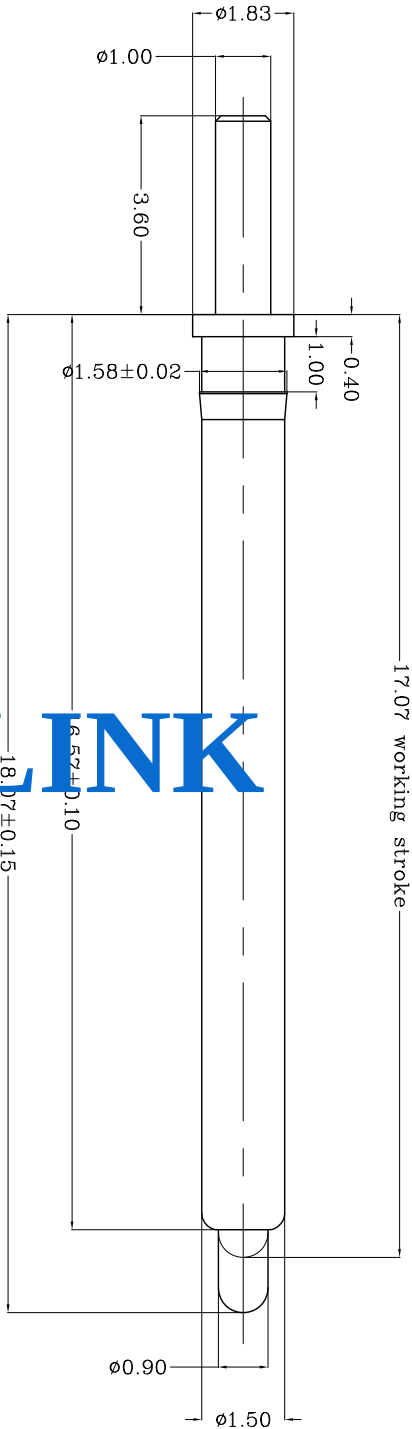

Notes:
⚠ Material(材质):

- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire
- Plating(电镀):
 - 1)Body: Min 0.125um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.125um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.5um Gold plating over min. 2.5um Nickel plating (Plunger: 镀金0.5um Min 镍底2.5um Min)
- Mechanical(机械性能):
 - 1)Force: 90 $\pm$ 30gf per pin at 1.0mm stroke (力: 下压1.0mm的力: 90 $\pm$ 30gf)
 - 2)Total stroke(总行程) : 1.50mm
 - 3)Durability(寿命): 10,000 cycle min.
- Electrical(电性能)
 - 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

TOP-LINK

LDC	—
DIST	—

	变更内部结构	
	NEW	
LTR	REVISION RECORD	APVD
		DATE

DIMENSIONS IN MM	
TOLERANCES UNLESS OTHER SPECIFIED	
0	= ± —
0.0	= ±0.15
0.00	= ± 0.10
0.000	= ± —
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

MATL		HT TR	—	FIN	— 
DWN	Qin	APVD	Top-Link Electronics Top-Link Electronics Ltd.		
CHK		REL			
NAME	PGGD PIN				
	PG-1.0-3.6-1.83-0.4-16.57-18.07				
SCALE	A4	DWG NO.	C-101124	SHEET 1 OF 1	REV B
1:1					

101124-1
PART NUMBER

4

3

2

1