




proposal

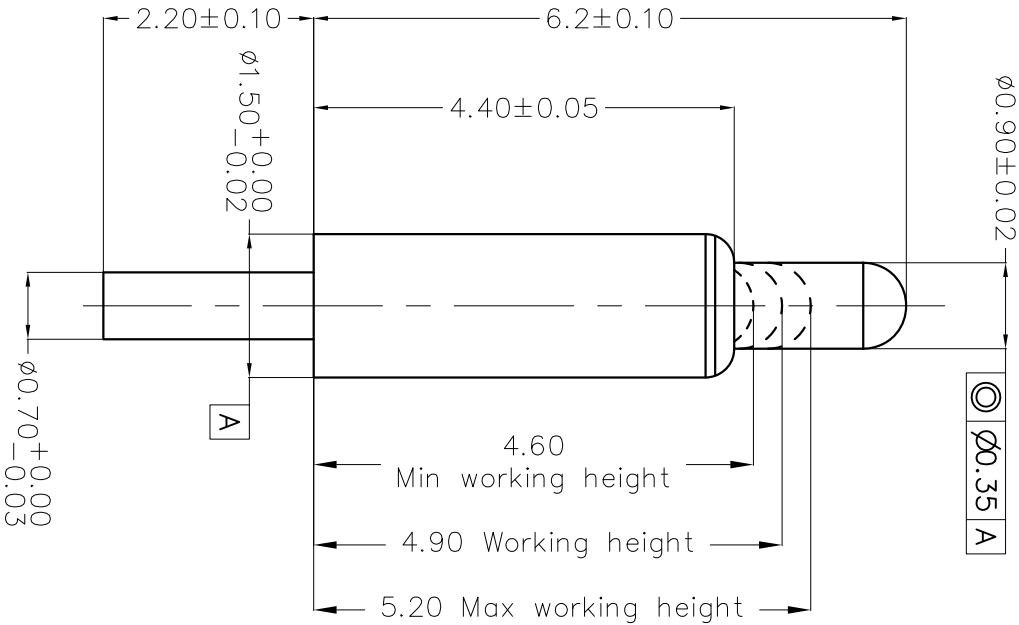

TOP-LINK


Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance

Working height	4.90mm	85±25gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Type	Customer drawing	Unit	Weight	PART NUMBER
Top-Link Electronics Ltd.	Electronics Ltd.	mm	_____	101692-1
TOLERANCES UNLESS OTHER SPECIFIED	DWN: Cai wanlu	APVD:	 Top-Link Electronics Ltd.	
0.0 = ±0.15 0.00 = ±0.10 0.000 = ±0.05 Angle: ±3°	CHK: REL:			
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.	Name POGO PIN	DWG No. C-101692	Page 1/1	Rev. A1
Scale 1:1	Size A4			