



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101276

LDC
-
DIST
-

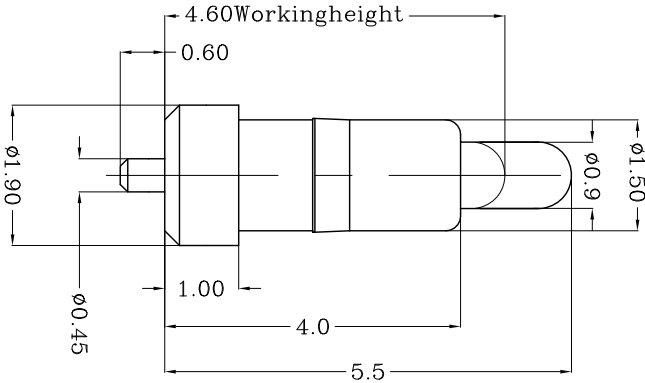

TOP-LINK

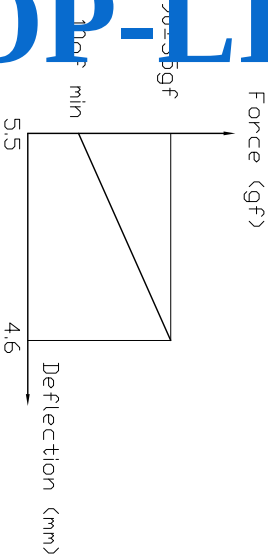

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).
 - 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.0mm
 - 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

USED ON
-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL		HT TR		FIN						
0	= ±-	DWN	APVD	1	A4	DWG NO.	C-101276	SHEET 1 OF 1	REV 1					
0.0	= ±0.15	CHK	Lansing											
0.00	= ± 0.10	REL												
0.000	= ±-	Jim												
ANGLE: ±1°				POGGO PIN										
SURF TEXTURE: 32/				PG-0.45-0.6-1.9-1.0-1.5-4.0-5.5										
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX														
DO NOT SCALE PRINT														

PART NUMBER

101276-1

Top-Link
Electronics Ltd.