


DWG NO.
C-101461

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

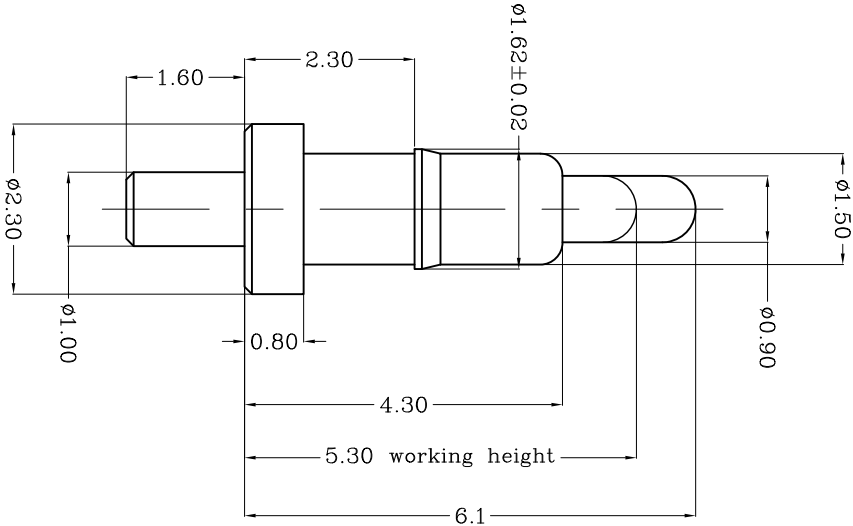

- Notes:
- 1) Material (材质):
Body : Brass
Plunger : Stainless steel wire
Plunger (电镀):
Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镀底1.4um Min)
- 2) Total stroke (总行程) : 1.50mm
- 3) Durability (寿命): 10,000 cycle min.
- 4) Dielectric (电性能)
Contact resistance (接触阻抗): 50mOhm Max.
Voltage rating (额定电压): 36V DC Max
Current rating (额定电流): 2.0A

NEW				
REVISION				
RECORD				
APVD				
DATE				

DIMENSIONS IN MM				
TOLERANCES UNLESS OTHER SPECIFIED				
0	= ±			
0.0	= ±0.15			
0.00	= ±0.10			
0.000	= ±			
ANGLE: ±1°				
SURF. TEXTURE: 32/				
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				
DO NOT SCALE PRINT				
NAME PGCD PIN				
PG-1.0-1.6-2.3-0.8-1.5-4.3-6.1				
SCALE	1:1	A4	DWG NO.	C-101461
SHEET 1 OF 1				
REV A1				

TOP-LINK
Electronics Ltd.

101461-1
PART NUMBER

USED ON
-