



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101345

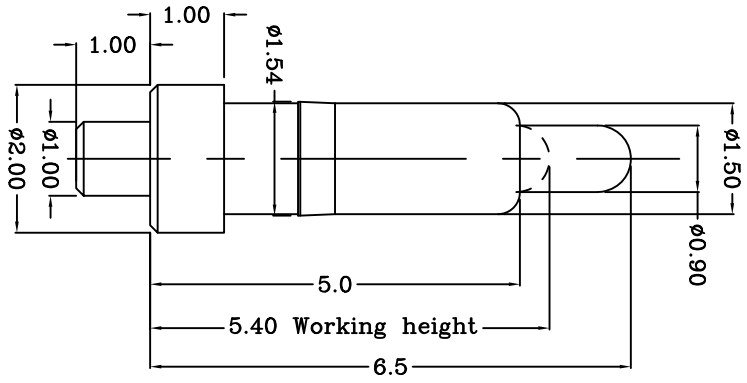

Notes:
△Material(材质):

- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire

2 Plating(电镀):
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3)Plunger: 镀金0.4um Min 镍底1.4um Min

3 Mechanical(机械性能):
1)Force:130±30gf per pin at 1.1mm stroke

2)Total stroke(总行程) : 1.5mm

3)Durability(寿命) : 10,000 cycle min.

4 Electrical(电性能)
1)Contact resistance(接触阻抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

TOP-LINK

USED ON
-

101345-1

PART NUMBER

MATL	HT	TR	FIN
△	—	—	—

DWN	APVD	REL
QIN		
CHK		

NAME	PGGD	PIN
	PG-1.0-1.0-2.0-1.0-1.5-6.5	

SCALE	A4	DWG	NO.	C-101345	SHEET	REV
1:1					1 OF 1	A1

DIMENSIONS IN MM	TOLERANCES UNLESS OTHER SPECIFIED
0	= ±
0.0	= ±0.15
0.00	= ±0.10
0.000	= ±
ANGLE: ±1°	
SURF TEXTURE: 32/	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

NEW	REVISION	APVD	DATE
			2007/05/06

LDC	DIST
-	-

4

3

2

1