



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101768

proposal

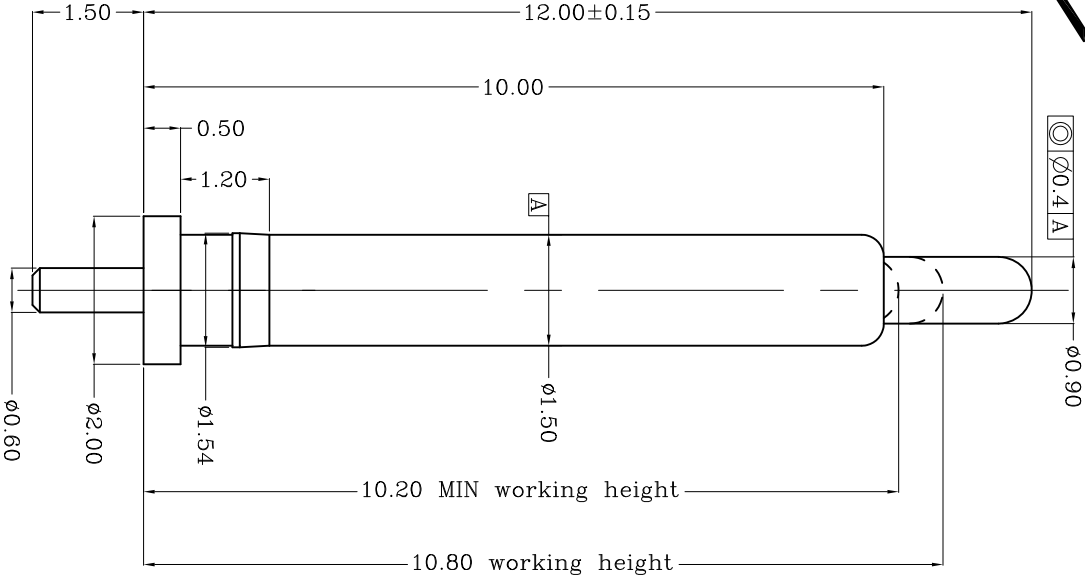

Rev.	Revision record.	Date.
	NEW	2013/07/18

Top-Link Electronics Ltd.			
TOLERANCES UNLESS OTHER SPECIFIED			
0.0	±0.15	APVD:	
0.00	±0.10	CHK:	REL:
0.000	±0.05	NAME	POGO PIN
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.			
Scale	Size	DWG No.	Page
1:1	A4	C-101768	1/1

PART NUMBER
101768-1

Table 1 Mechanical performance		
working height	10.80mm	120±25gf <2.1>
Durability	10,000cycle	

TOP LINK

- Not
- 1 Demnisions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than the working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	
4				
5				