



LDC
-
DIST
-

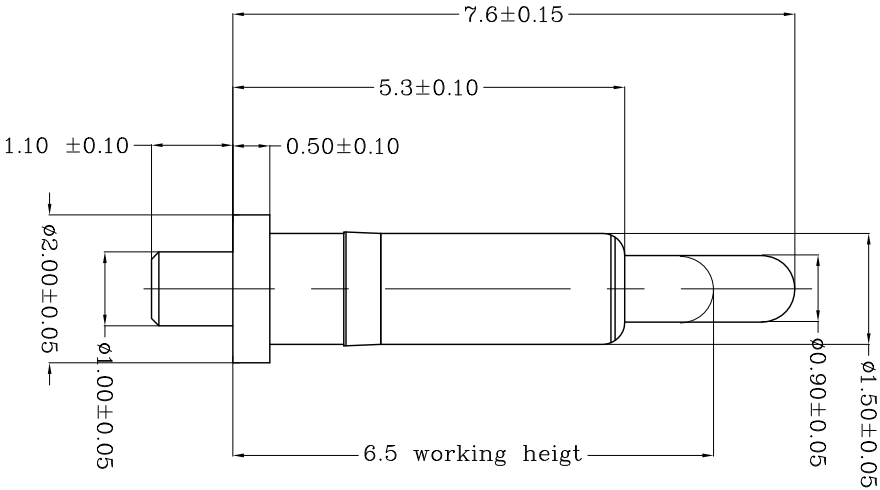

TOP-LINK

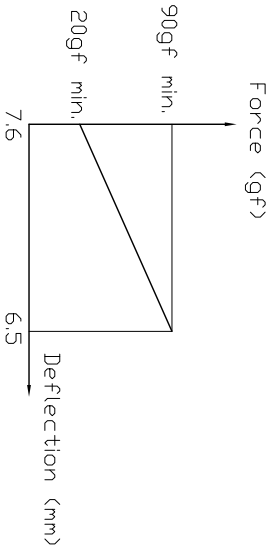

Notes:

- 1)Material:
Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
3 Mechanical
1)Total stroke : 1.4mm
2)Durability: 10,000 cycle min.
Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

L TR	NEW	REVISION RECORD	APVD	DATE
				080625

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME		POGDO PIN	
SCALE 1:1		PG-1.0-1.1-2.0-0.5-1.5-5.3-7.6	
A4		DWG NO. C-101220	
REL		SHEET 1 OF 1	
CHK		REV A	
DWN		APVD	
MATL		HT TR	
FIN		PART NUMBER	