




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101334

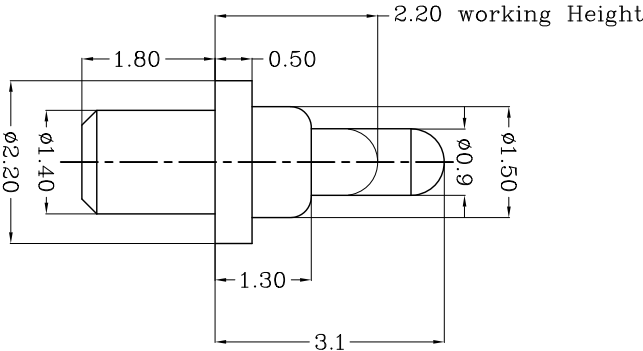

TOP-LINK

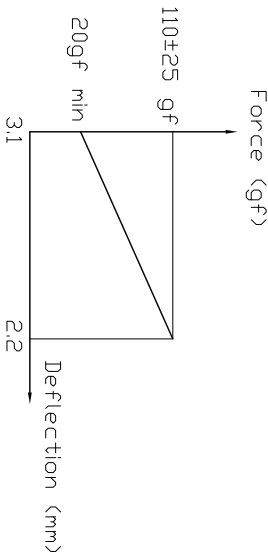

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2)Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 1.1mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED DN
-

101334-1

PART NUMBER



DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL



HT TR

FIN

APVD

Lansing

REL

Top-Link
Electronics Ltd.

PGGD PIN Customer Drawing
PG-1.4-1.8-2.2-0.5-1.5-1.3-3.1

SCALE

1:1

A4

DWG NO.

C-101334

SHEET

1 OF 1

REV

A

NAME

Jim

CHK

REL

APVD

Lansing

REL

Top-Link
Electronics Ltd.

PGGD PIN Customer Drawing
PG-1.4-1.8-2.2-0.5-1.5-1.3-3.1

SCALE

1:1

A4

DWG NO.

C-101334

SHEET

1 OF 1

REV

A

DATE

2009/02/19

APVD

REVISION

RECORD

L TR

NEW

LOD

-

DIST

-

4

3

2

1