
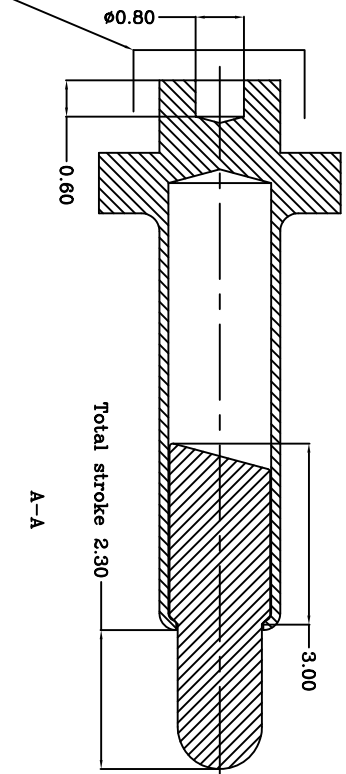


DWG NO.
C-101274

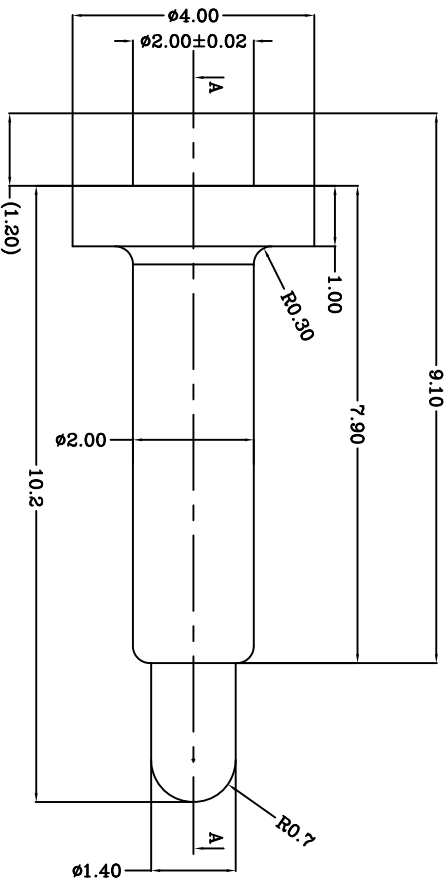

Consider about
Capability for riveting

TOP-LINK

△Material(材质):

- 1) Body : C36000
 - 2) Plunge : C36000 or C27000
 - 3) Spring : Stainless steel wire
- 2 Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 鍍金0.1um Min 鍍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

Mechanical(机械性能):

- 1) Force. 25gf min per pin at 0.5mm stroke
75±25gf per pin at 1.0mm stroke
125gf max per pin at 1.5mm stroke
(力: 下压0.5mm的力25gf min;

下压1.0mm 的力: $75 \pm 25 \text{ gf}$;
下压1.5mm 的力 125 gf max

2) Total stroke(总行程) : 2.30mm

3)Durability(寿命): 20,000 cycle min.

4. Electrical (电性能)

1)Contact resistance(接触阻抗): 30mOhm Max.

2) Voltage rating (额定电压): 36V DC Max

3) Current rating (额定电流): 2.0A

Operating temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

6 All material meet requirement of RoHS

[illegible]

USED ON

101274-1

PART NUMBER

top-Link
Electronics

Top-Link
Electronics L td.

A

W

D