DWG NO. 101256

USED ON
—

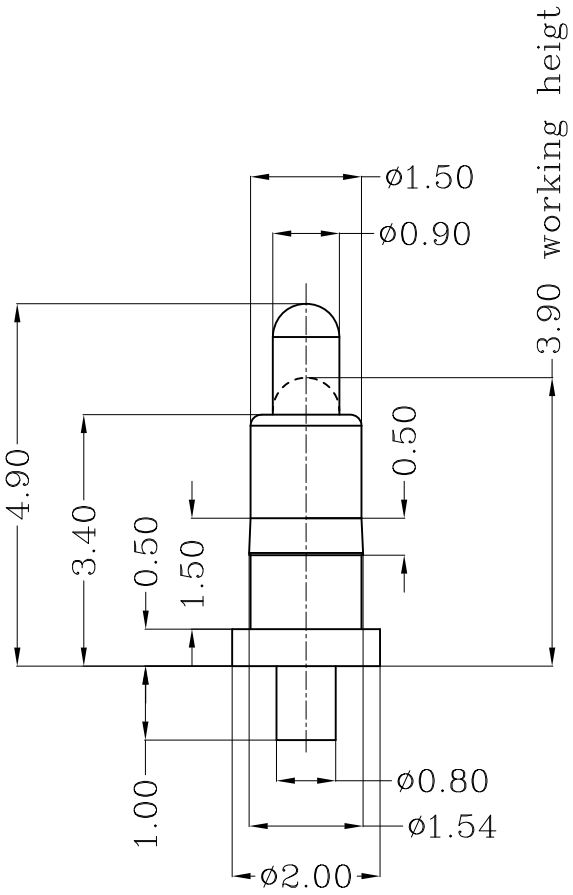

TOP-LINK

Notes:
⚠1 Material:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
3 Mechanical
1)Total stroke : 1.4mm
2)Durability: 10,000 cycle min.
4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

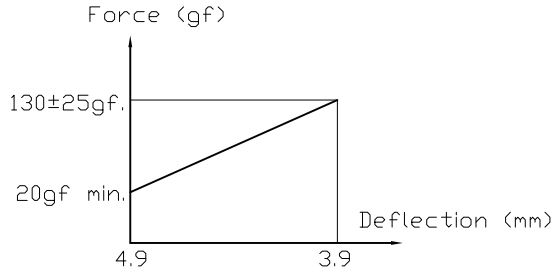

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LOC	DIST
-	-

LTR	REVISION RECORD	APVD	DATE
	NEW		080813

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
⚠1	—	— ✓

DWN	APVD	
Qin	Lansing	top-Link Electronics Top-Link Electronics Ltd.
CHK	REL	
Jim		

NAME: POGO PIN
PG-0.8-1.0-2.0-0.5-1.5-3.4-4.9

SCALE		DWG NO.	SHEET	REV
1:1	A4	C-101256	1 OF 1	A

101256-1
PART NUMBER

4 3 2 1

D C B A