




DIST

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Total stroke : 3.4mm
 - 3 Electrical performance
Resistance:50mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

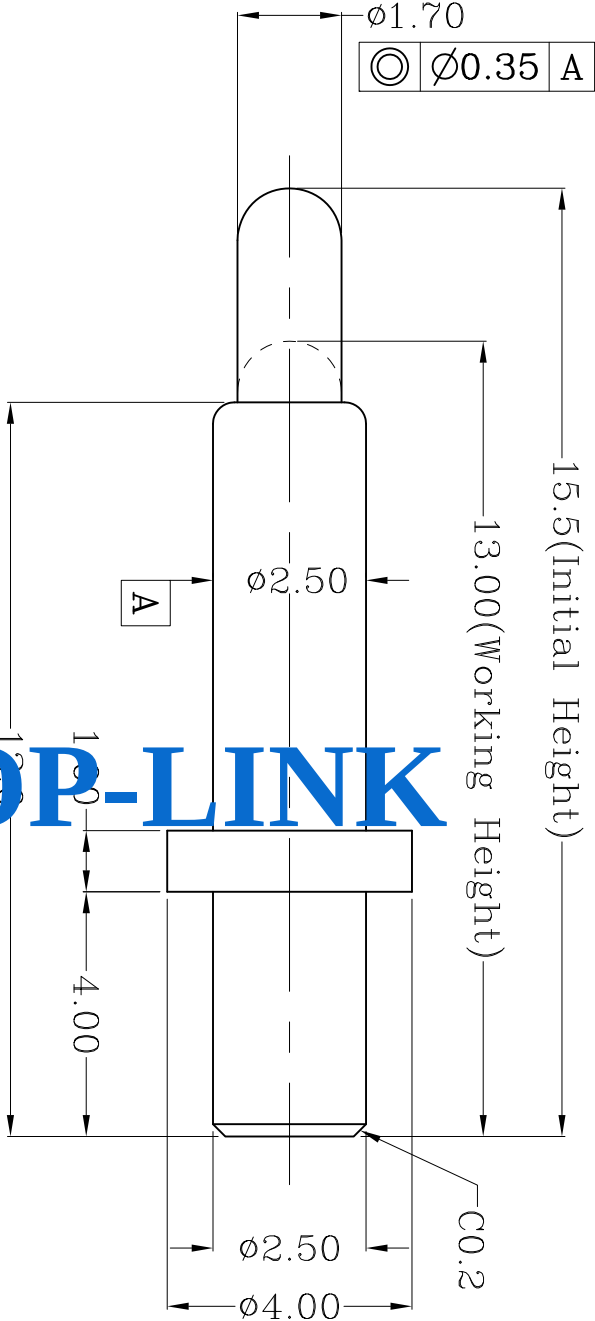

TOP-LINK

Table 1 Mechanical performance

working height	13.0mm	80±25gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

		Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight		
		TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:				
		0.0 = ±0.15		CHK:	REL:	Top-Link Electronics Top-Link Electronics Ltd.				
		0.00 = ±0.10								
		0.000 = ±								
		Angle: ±1°								
		SURF. TEXTURE:								
		REMOVE BURRS								
		BREAK SHARP EDGES								
		R0.05 MAX. DO NOT								
		SCALE PRINT.		Scale	Size	DWG No.	Page	Rev.		
				1:1	A4	C-101207	1/1	B		
Renewal		2011/08/12								
NEW		2008/05/19								
Revision record.		Date.								
3				2						