


DWG NO.
C-101023

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

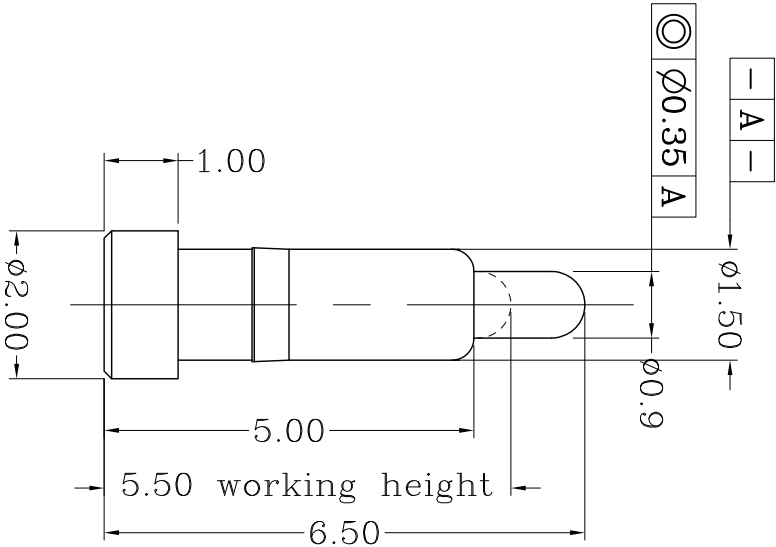

Notes:

Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring : Stainless steel wire

Plating(电镀):

1)Plunge: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Pinner: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1) Force: 125±30gf per pin at 1.0mm stroke

(力: 125.0mm 的力: 125±30gf)

2) Total stroke(总行程) : 1.40mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1) Contact resistance(接触阻抗): 30mOhm Max.

2) Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

TOP-LINK

renewal			2010/09/27
NEW			2007/05/06
REVISION RECORD	APVD	DATE	
LTR			

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ± -		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
CHK	REL		
NAME			
POGO PIN			
PG-2.0-1.0-1.5-6.5			
SCALE 1:1			
A4			
DWG NO. C-101023			
SHEET 1 OF 1			
REV B			

101023-1
PART NUMBER

USED ON

-