THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT
NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT
WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO. C-101062

USED ON

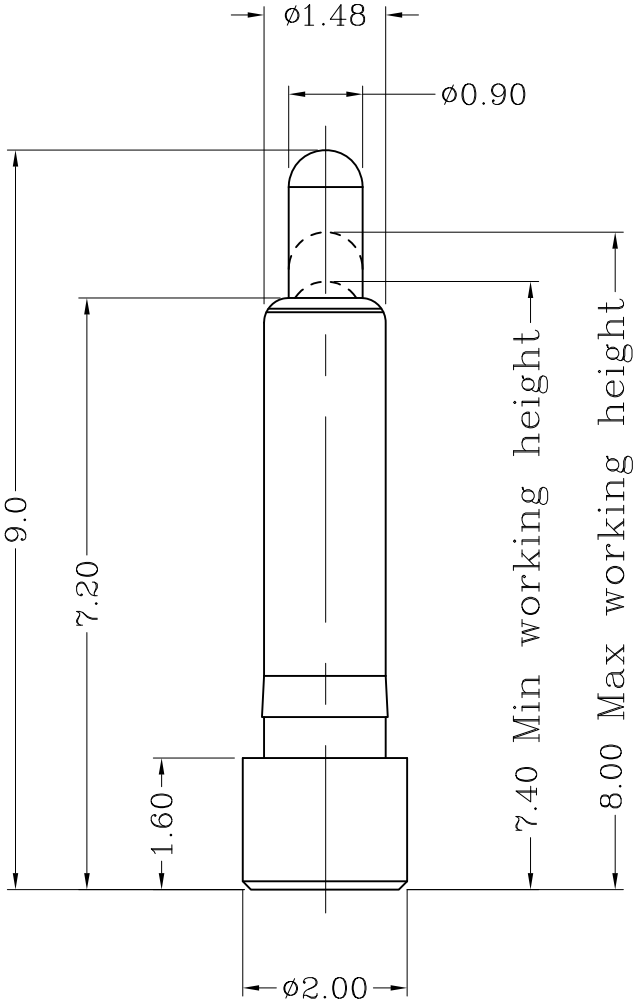

TOP LINK

Notes:

1. Material:
   1) Plunger & Body : CuZn36 Pb3, HO2 (C36000)
      or CuZn39 PB3 or CuZn38 PB2.
   2) Spring : Stainless steel wire
2. Plating
   1) Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
   2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
3. Mechanical
   1) Force: Min 100±30gf per pin at 1.0mm stroke
   2) Total stroke : 1.6mm
   3) Durability(寿命): 10,000 cycle min

LTR	REVISION RECORD	APVD	DATE
	NEW		2007/06/04

LOC -
DIST -

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±-
0.0 = ±0.10
0.00 = ±-
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL 1	HT TR —	FIN — ✓	
DWN Qin	APVD	Top-Link Electronics Ltd.	
CHK	REL		
NAME	POGO PIN PG-2.0-1.6-1.5-7.2-9.0		
SCALE 1:1	A4	DWG NO. C-101062	SHEET 1 OF 1 / REV A

101062-1
PART NUMBER

4 3 2 1

D C B A