



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101020

proposal

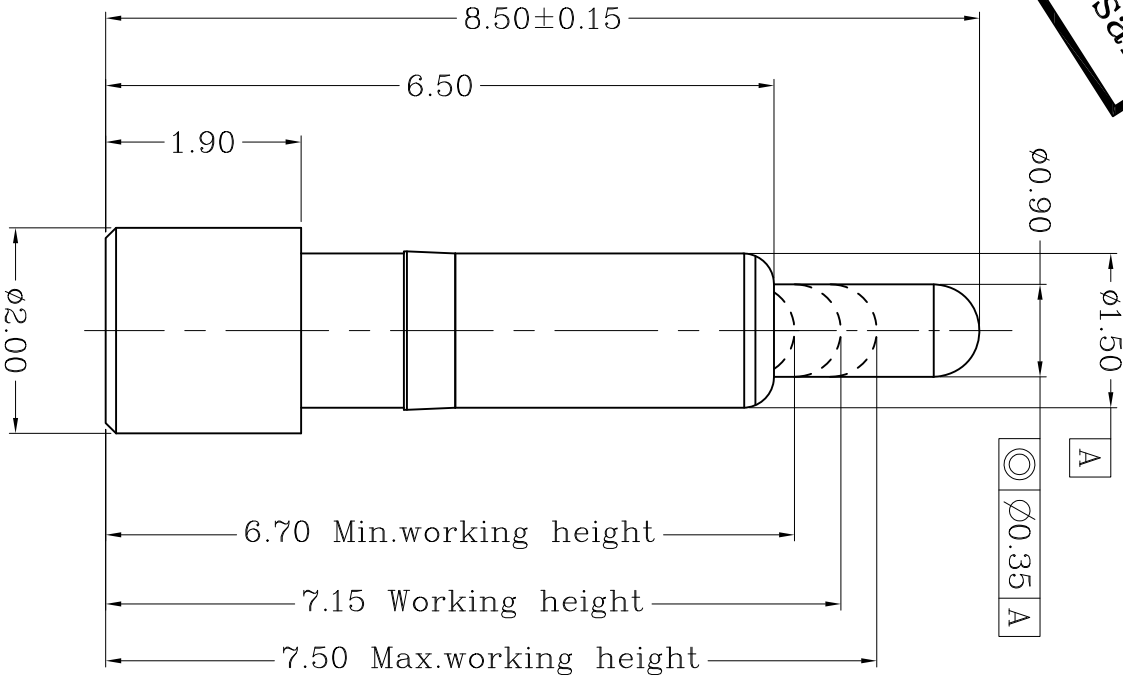

Item	Part name	Qty/Ea	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance

Working height	7.15mm	168±25gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 <2.1>Warning: Working height are not permitted to be less than Min working height.
- 5 Electrical performance
- 6 Resistance: 30mOhm Max.
- 7 Current rating: 2.0A
- 8 RoHS compliant.

TOP-LINK

DIST

B1	Update	2015/12/25
B	Update remark	2007/09/28
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	_____
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wonlu	APVD:		Top-Link Electronics Top-Link Electronics Ltd.	
0.0 = ±0.15		CHK:		REL:			
0.00 = ±0.10							
0.000 = ±0.001							
Angle: ±1°							
SURF. TEXTURE: REMOVE BURRS:		Name POGO PIN					
BREAK SHARP EDGES RO.05 MAX. DO NOT SCALE PRINT.		Scale 1:1	Size A4	DWG No. C-101020	Page 1/1	Rev. B1	

101020-1
PART NUMBER