



LDC
-
DIST
-

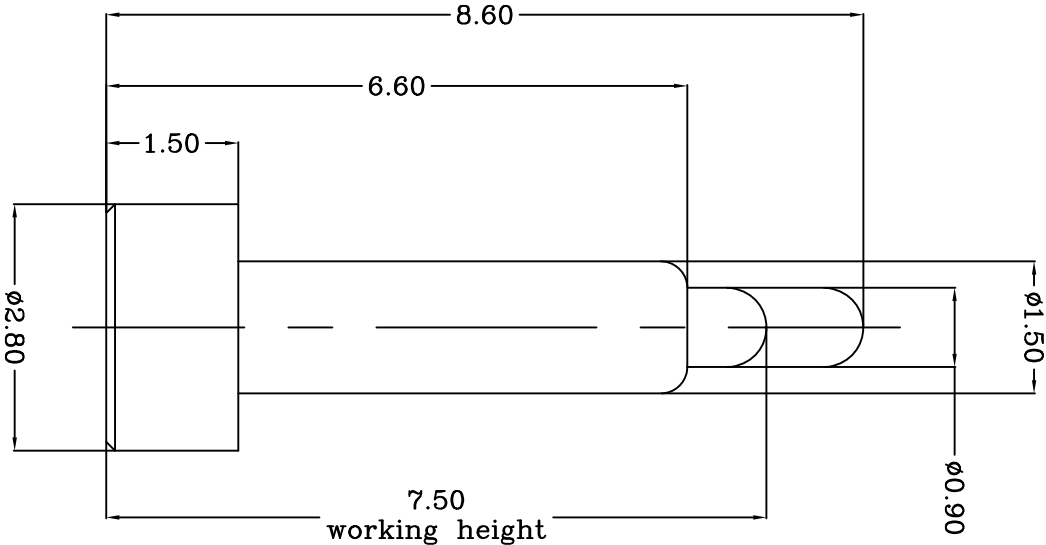

TOP-LINK

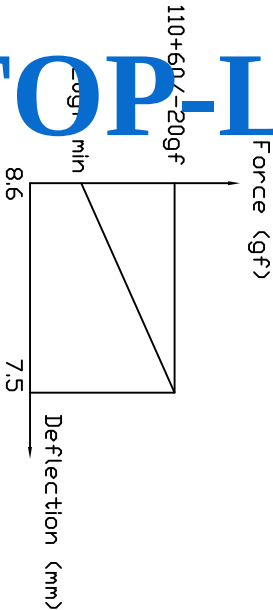

Notes:

Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating
- 3 Mechanical
 - 1)Total stroke : 2.0mm
 - 2)Durability: 10,000 cycle min.
- 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

USED ON

-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -	0.0	= ±0.10
0.0	= ±0.10	0.00	= ± 0.10
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/ V			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL		HT TR	FIN
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME		PGGD PIN	
		PG-2,8-1,5-8,6H	
SCALE	A4	DWG NO.	SHEET
1:1		C-101043-1	1 OF 1
			REV
			A